


DeriveTM 5

The Mathematical Assistant for Your PC



*by Bernhard Kutzler
& Vlasta Kokol-Voljc*

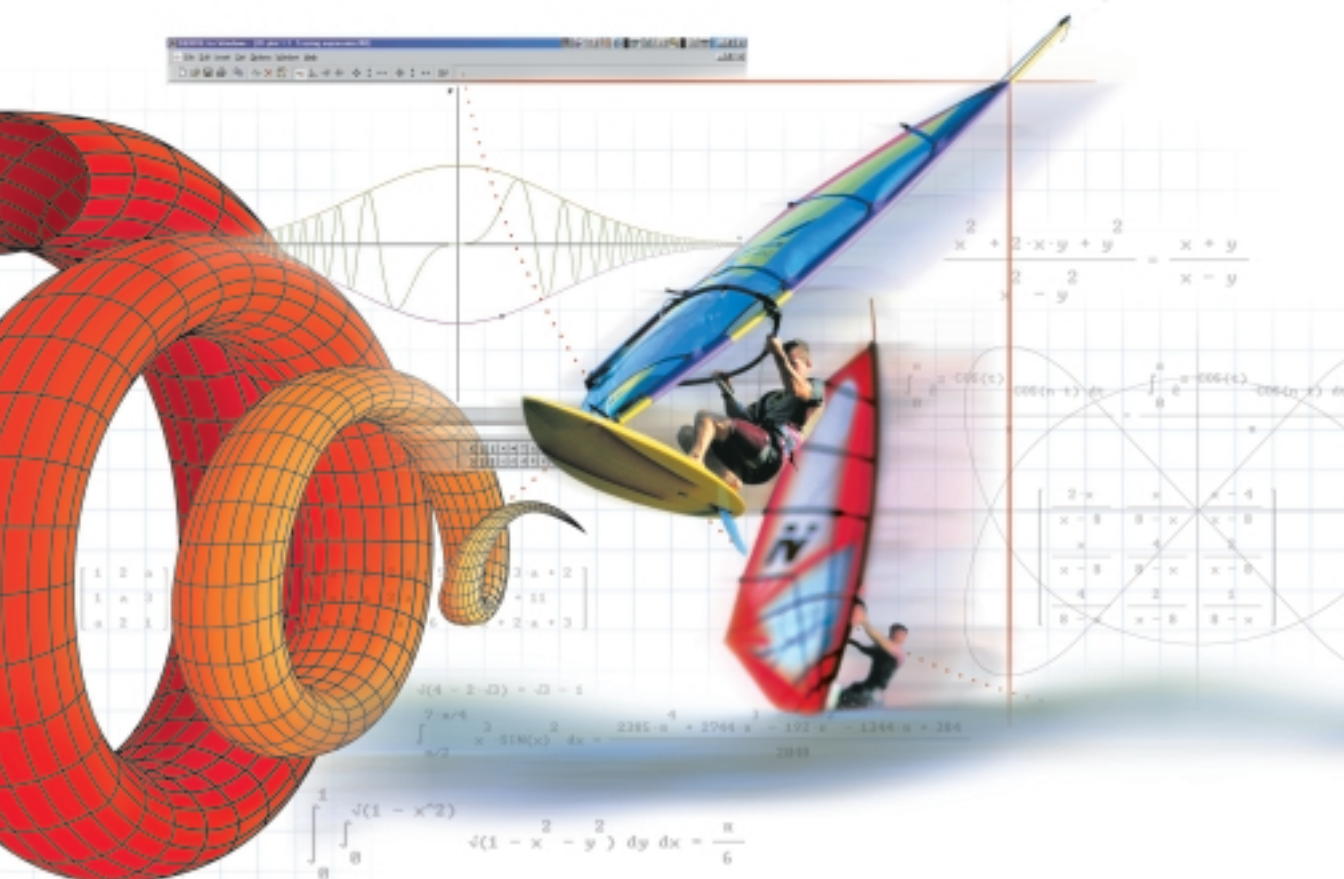

Bernhard KUTZLER
Vlasta KOKOL-VOLJC

Introduction to DERIVE™ 5

The following Derive™ 5 documentation is being provided as a courtesy of the authors, Bernhard Kutzler / Vlasta Kokol and the publisher Texas Instruments. We invite you to use the following abbreviated document during your personal evaluation of Derive™ 5. Use of the document for any other purpose is strictly prohibited.

A book for learning how to use DERIVE 5

Kutzler, Bernhard & Kokol-Voljc, Vlasta

Introduction to DERIVE 5

2000

© 2000 Kutzler & Kokol-Voljc OEG, Austria

1. Edition, 1. Printing: March 2000

Typesetting: Bernhard Kutzler, Leonding, Austria

Cover art: Texas Instruments Incorporated, Dallas, Texas, USA

The author and publisher make no warranty of any kind, expressed or implied, with regard to the documentation contained in this book. The author and publisher shall not be liable in any event for incidental or consequential damages in connection with, or arising out of, the furnishing, performance or use of this text.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form, or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior permission, in writing, from the publisher.

DERIVE is a trademark of Texas Instruments Incorporated

WINDOWS, WINDOWS95, WINDOWSNT, and WIN32S are registered trademarks of Microsoft Corp.

Table of Contents

Introduction	1
Chapter 1: First Steps	3
Chapter 2: Documenting Polynomial Zero Finding	23
Chapter 3: The Whole and Its Parts – Subexpressions	43
Chapter 4: Equations and Inequalities	63
Chapter 5: Approximate Versus Exact Computations	83
Chapter 6: Sequences and Families of Curves	95
Chapter 7: Investigations in Space	117
Chapter 8: What Is ‘Simple’?	135
Chapter 9: Vectors, Matrices, and Sets	153
Chapter 10: Parametric Plots	171
Chapter 11: Towards a Module for Analytical Geometry	185
Chapter 12: Some Calculus	203
Chapter 13: More on Plotting	221
Chapter 14: What Else Can DERIVE Do?	243
Learn More about DERIVE	261
Appendix A: DERIVE Startup Options	263
Appendix B: Factory Default DERIVE	265
Index	269

Preface

The desire to make DERIVE 5 easily and quickly accessible led to this book.

Many thanks to Albert Rich and Theresa Shelby, the principal authors of DERIVE 5, for their continuous support during the writing of this book.

Many thanks to Patricia Littlefield and David Stoutemyer who polished the language of this book.

Bernhard Kutzler & Vlasta Kokol-Voljc, February 2000

Introduction

DERIVE is a mathematical computer program. It processes algebraic variables, expressions, equations, functions, vectors, and matrices like a scientific calculator processes floating point numbers. DERIVE can perform numeric and symbolic computations, algebra, trigonometry, calculus, and plot graphs in 2 and 3 dimensions. The main strength of DERIVE are symbolic algebra and powerful graphics. It is an excellent tool for doing and applying mathematics, for documenting mathematical work, and for teaching and learning mathematics.

For a teacher and student, DERIVE is the ideal tool for supporting the teaching and the learning of mathematics. By providing numeric, algebraic, and graphic capabilities together with seamless integration of these, DERIVE enables new approaches in teaching, learning, and understanding mathematics. You will find that many topics can be treated more efficiently and effectively than by using traditional methods. Many problems that require extensive and laborious training at school can be solved with a single keystroke using DERIVE: It eliminates the drudgery of performing long mathematical calculations. While DERIVE takes the burden of doing the mechanical/algorithmic parts of solving a problem, students can concentrate on the mathematical meaning of concepts. Instead of teaching and learning boring technical skills, teachers and students can concentrate on the exciting and useful techniques of problem solving. It has proven to be highly supportive for the cognitive development of advanced mathematical concepts.

For an engineer, DERIVE is the ideal tool for fast and effective access to numerous mathematical operations and functions and for visualizing problems and their solutions in various ways. If you use DERIVE for your everyday mathematical work, you will find it a tireless, powerful, and knowledgeable mathematical assistant that is easy to use.

This book is for learning how to use DERIVE 5 by private study. Install DERIVE 5 on your computer. Starting with the first chapter, you will learn step by step how to use the program. Follow all instructions and examples. The text leads you through several mathematical topics that are used for learning how to solve mathematical problems with DERIVE. Many of the examples also provide ideas for using DERIVE during teaching; some of them are explained in more detail in “Educator’s footnotes.” Paragraphs starting with the symbol  give instructions about what you should do on your computer. Hundreds of screen dumps ensure that you will not get lost on this journey.

By solving typical mathematical high school level problems, you will learn to handle DERIVE 5 as much as necessary for everyday use and for teaching or learning mathematics. You will learn how to use the major commands, keys, and functions. At the end of each chapter you will find a summary of the features learned in that chapter. The Quick Reference Guide at the end of the book is a summary of commands, keys, functions, and utility files, which is organized by tasks. The index at the end is useful if you need to locate a particular portion of the text.

All you need to run DERIVE 5 is a PC compatible computer with WINDOWS 95, WINDOWS 98, or WINDOWS NT.

It is assumed that you know how to use computers and the WINDOWS operating system. The screen shots in this book were produced from DERIVE running on WINDOWS NT. If you are running DERIVE on WINDOWS 95 or 98, some of the screens may appear slightly different.

This book introduces all features and functions that are required for routine use of DERIVE 5. There is more functionality than can be described here. This book is *not* a reference manual for DERIVE. A complete reference to all features is included with the software as online help. Some of the chapters give examples of how to use the online help.

We plan to write additional texts on DERIVE 5. Please regularly look at the web site **<http://series.bk-teachware.com>** for new texts and local dealer information.

Have fun reading and discovering.

Chapter 1: First Steps


DERIVE makes it easy to perform mathematical operations: Enter an expression, apply a command, and a new expression is obtained. All expressions can be used for new computations—just like on a piece of paper. This chapter teaches the basic techniques of using DERIVE 5. Note: For simplicity, we will abbreviate DERIVE 5 as DERIVE throughout this text.

This text assumes that you use a factory default DERIVE. Only then will your screen images fully match those in this book. If you just installed DERIVE, it is a factory default version. If you use a version of DERIVE that was used by someone else, we recommend that you turn it into a factory default version now. Appendix B gives instructions on how to do this.

Start DERIVE by double clicking on the DERIVE icon. If there is no DERIVE icon on your computer's desktop, you probably will find DERIVE on the **Start** menu or via **Start>Programs**.



The following screen appears after a few seconds:

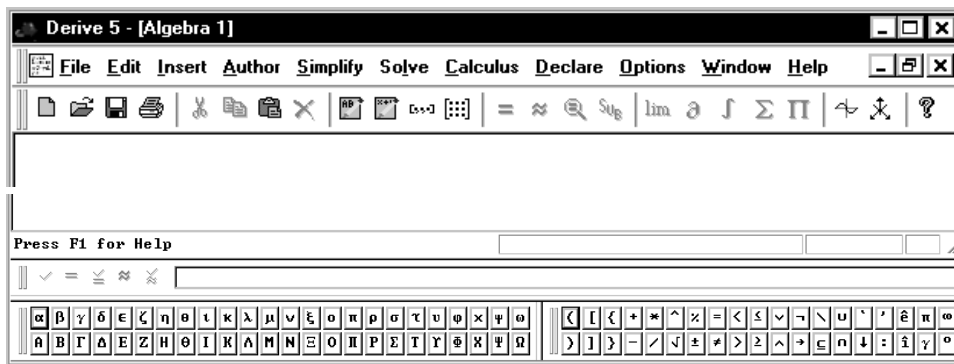


The DERIVE screen comprises (from top to bottom):

- the Titlebar
- the Menu Bar
- the Command Toolbar
- a (currently empty) Algebra Window, also called the View
- the Status Bar
- the Expression Entry Toolbar, also called the entry line
- the Greek Symbol Toolbar and the Math Symbol Toolbar

Work with DERIVE by entering expressions and applying commands, thus creating a worksheet. After starting DERIVE, the system is ready to accept user input via the Expression Entry Toolbar, as is indicated by the blinking cursor in the toolbar's entry field. Input mode can be implemented with the Command Toolbar's tenth button from the left, labeled .

 Learn more about the button  by moving the mouse pointer onto it.

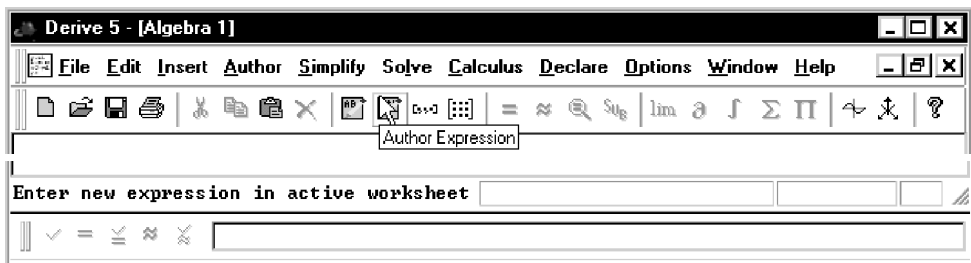


The message **Author Expression** below the cursor is the button's title. The Status Bar message Enter new expression in active work sheet is the button's function description.


 Prepare for entering an expression: Move the mouse pointer onto , then click (i.e. press and release) the left mouse button.




 Enter the fraction: 2/3



 End the input with the 'Enter'-key .

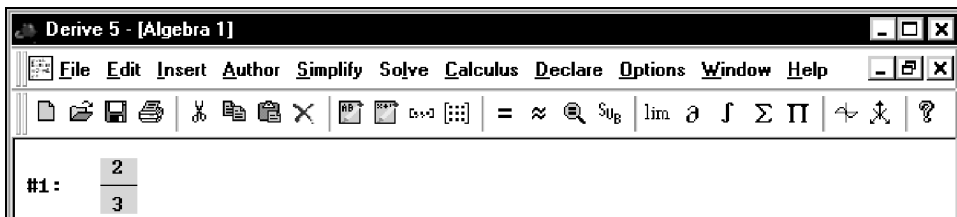

DERIVE displays this expression as a fraction with a horizontal line, a numerator, and a denominator, i.e. in “2-dimensional” output format, as opposed to the “1-dimensional” or “linear” input format used for entering the number. The expression's unique label number, #1, is shown to the left of the expression. DERIVE is again ready to accept the next input, i.e. input control (the *focus*) is still in the entry line. Also observe that a copy of the input is still in the entry field and is entirely highlighted. This has the same meaning as in text editors and word processors. You can remove the highlighting with the right arrow key, then edit the string of symbols, or you can replace the marked string by typing new symbols.



Replace the last input by $\frac{1}{2} + \frac{1}{3}$ with an intentional typographical error:

Enter $1/2+1\&3$ .



When a syntax error is detected, the cursor is moved to the location of the error and the cause of the error is displayed in the Status Bar's first pane. In the above example DERIVE discovered an unexpected special character. In some cases (for example, when entering an opening parenthesis instead of the division symbol) there are several errors possible, and DERIVE can only guess.


Update the input to $1/2+1/3$: Use the  key (or the right arrow key  followed by the backspace key ) to delete the incorrect character, then type the division operator. Conclude with .



The expression and its label, #2, are displayed. The new expression is highlighted in reverse video. Expression #1 is no longer highlighted.

If you mistyped the input and want to delete the highlighted expression for a retry, use  to move the focus into the algebra window, use the 'Delete' key  to delete the highlighted expression, then use the **Author Expression** button to move the focus back into the entry line. An alternative technique for replacing an expression will be explained in Chapter 2.

Simplify expression #2 using the Command Toolbar's **Simplify** button .




The result becomes the next expression with the label #3. By default, simplified expressions are displayed centered. This makes it easy to distinguish between entry and result. As with many other behaviors of DERIVE, this can be customized if desired.

Even after using the **Simplify** button, the focus still is in the entry line. Enter the next expression, $\sqrt{24}$. To enter the square root symbol, use the respective button on the Math Symbol Toolbar:



Enter $\sqrt{24}$ as:  24 .



 Simplify using .

#5 :	$2 \cdot \sqrt{6}$
------	--------------------

This is different from what an “ordinary” calculator would produce. A mathematician once asked: “*How do you recognize a mathematician?*” and suggested the following answer: “*A mathematician considers expression #5 a beautiful result.*” Most students strive to replace such an expression by the corresponding floating point approximation. DERIVE can do this as well: Highlight expression #4 so that you can apply a different command to it.

 Highlight expression #4 by moving the mouse pointer anywhere in the row occupied by the expression, then clicking the left mouse button.

#4 :	$\sqrt{24}$
------	-------------

Selecting an expression with the mouse button is one technique of highlighting it. An alternative technique is first to move the focus into the algebra window (if necessary) using the  key, then using the cursor keys  or  to move the highlighting one expression up or down.

 Approximate using the Command Toolbar’s **Approximate** button .

#6 :	4.898979485
------	-------------

While an expression is highlighted, the Status Bar’s second pane shows the automatically generated expression annotation. The third pane shows the computing time in case the expression was obtained as a result of a computation. For expression #6 this is:

Approx(#4)		0.000s	
------------	---	--------	---

The automatically generated annotation explains how the expression was obtained.

Approx(#4) means that the expression was obtained by applying the **Approximate** button (or command) to expression #4. The computation time displayed in the third pane, 0.000s, indicates that the calculation took less than 0.001 seconds (the time may be different on your computer).

 Highlight expression #4, ...

User			
------	---	--	---

 ... then expression #5.,

Simp(#4)		0.000s	
----------	---	--------	---

The annotation of expression #4, User, means that it was entered by the user; the annotation of expression #5, Simp(#4), indicates that the expression was obtained by applying the **Simplify** button (or command) to expression #4. The first pane is always available for messages associated with a menu item, button, or command status.

DERIVE worksheets also can include text and other objects. The easiest way of entering text is via the Command Toolbar’s **Insert Text** button . New expressions are added at the end of the

worksheet. Other objects (including text objects) are added after the highlighted object. To insert a text object above the square root of 24, first highlight the object that is now above it.

- Highlight expression #3.

#3:	$\frac{5}{6}$
-----	---------------

- Display a function description of the **Insert Text** button  by moving the mouse pointer onto it.

Insert new text object in active worksheet `Simp(#2)` 0.000s

- Insert a text object by clicking on the **Insert Text** button .

#3:	$\frac{5}{6}$
#4:	$\sqrt{24}$

Highlighting of a text object is indicated by a frame around it. The blinking cursor inside indicates text editing mode.

- Enter the text: We compute the square root of 24:

We compute the square root of 24:

A text object allows simple text editing similar to what you can do in standard text editors. Later you will learn how to change the font size, alignment, color, etc.

As a next example compute 1234^{56} . Due to the previous activity, the focus now is in the algebra window. Before you can enter another expression, move the focus into the entry line.

- Enter 1234^{56} by using the **Author Expression** button , then typing the respective string of digits followed by . The exponentiation operator ^ can be found on both the keyboard and the Math Symbol Toolbar. (It is the sixth symbol from the left in the first row.)

#7:	1234^{56}
-----	-------------

- Simplify using .

#8:	12991190255487145194103208439623513775465782010127392384379012704624~ 259433055094648925678485362472902010613951564738491094492118652386~ 5849056275359066262352911682504769929216
-----	--

This is a very big number. For those who want to know the number of digits, there are two methods to find out: First, you can count them. Second, you can approximate the number.


- Approximate using .

#9: $1.299119025 \cdot 10^{173}$

The answer is displayed in scientific notation. Since the count of whole digits is one more than the power of 10, the number has $173+1 = 174$ digits.

In the next exercise, you will learn a different technique of entering expressions by using the buttons preceding the entry field.

- Type into the entry line $x/3+x/4$ this time **without concluding with** .

 $x/3+x/4$

Note the five buttons left of the entry field. The usual technique of moving the mouse pointer onto a button reveals the first one, , as the **Author Expression** button. Selecting this button has the same effect as concluding the input with the  key. Try it:

- Enter the above expression with , then simplify as usual using the Command Toolbar's **Simplify** button .

#10: $\frac{x}{3} + \frac{x}{4}$

#11: $\frac{7 \cdot x}{12}$

Unlike ordinary calculators, DERIVE can perform nonnumeric (symbolic, algebraic) computations such as simplifying expression #10 into expression #11.

For the next example use the Expression Entry Toolbar's second button, .

- To simplify $x+2x$ immediately, type $x+2x$ then select the entry line's **Simplify** button .

#12: $3 \cdot x$

$\text{Simp}(\text{User})$ 0.000s

 $x+2x$

Simplify

This button simplified the entered expression immediately without the usual display of the unsimplified expression. Note the result's annotation: $\text{Simp}(\text{User})$

For the next example use the Expression Entry Toolbar's third button, .

- Enter and simplify $xy + \sin x$ by typing $xy+\sin x$ then using the entry line's **Author and Simplify** button .

#13: $x \cdot y + \text{SIN}(x)$

#14: $\text{SIN}(x) + x \cdot y$

$\text{Simp}(\#13)$ 0.000s

 $xy+\sin x$

This button produced two expressions, #13 and #14 and has the same effect as entering the unsimplified expression with  or , then simplifying it with . It is, therefore, a convenient shortcut for the frequently used “enter and simplify.” This example also shows how convenient fast input is in DERIVE. You can enter expressions just as you would write them on paper. For ‘ x times y ’ simply enter xy . No multiplication operator is needed between x and y . For ‘Sine of x ’ simply enter $\sin x$. No parentheses are needed around x .

The Expression Entry Toolbar has buttons for entering, simplifying, entering & simplifying, approximating, and entering & approximating expressions.

The simplified expression #14 differs from the unsimplified expression #13 only in the order in which its terms are displayed. While unsimplified expressions are displayed as they were entered (except for the 2-dimensional pretty print format), simplified expressions are displayed in a standardized format using a certain term ordering.

Back to how simple it is to enter expressions. A consequence of the convenient fast input, such as $xy + \sin x$ for $x \cdot y + \sin(x)$, is that variable names can consist of only one character (for example x and y). This suffices most of the time, but if you need to use multicharacter variable names, DERIVE allows this, too (for example $time$ or $x12$). Using multicharacter variable names will be explained in Chapter 14.

Clearly, you cannot omit all parentheses. For example, you will need to parenthesize the

denominator to enter a rational expression such as $\frac{2}{x+1}$. If the parentheses are omitted in this example, the resulting expression has a different meaning.

 Enter: $2/x+1$

#15: $\frac{2}{x} + 1$

Oops—the expression on the screen looks different from the intended expression! DERIVE applies operations in the conventional order, for example multiplication and division before addition and subtraction. As you can see from the above example, the 2-dimensional screen display of an input provides you with valuable feedback about the soundness of your input.¹

¹ **Educator’s footnote:** A very simple educational exercise with DERIVE, therefore, consists of asking the students to input expressions given to them on the chalkboard or a piece of paper. Because DERIVE features 2-dimensional output of expressions, the students get an immediate feedback. If the expression on the screen looks different from the one on the chalkboard or paper, then the input was wrong, and they must try again. When the teacher lets students input expressions of increasing complexity, they learn how to “linearize” expressions by trying and experimenting (trial and error), and learn to understand the structure of expressions. In this way, they improve their competence in recognizing structures, which is one of the basic mathematical skills important in many areas.

When correcting the most recent input, you can take advantage of the fact that a copy of the most recent input and the focus are still in the entry line.

- ☞ To edit the expression use the right arrow key  to remove the highlighting. Change the input to $2/(x+1)$ by adding the parentheses, then enter the expression with .

#16: $\frac{2}{x+1}$

Now it looks correct. Since you don't need expression #15 any more, delete it.

- ☞ Prepare for deletion: Highlight expression #15 either with the mouse or with the keyboard's arrow keys after moving the focus into the algebra window using .

#15: $\frac{2}{x} + 1$

- ☞ Delete expression #15: Use the **Delete Object** button  or press the  key.

#15: $\frac{2}{x+1}$

The expression that was expression #15 disappeared. The expression that was expression #16 has become expression #15. By default, automatic renumbering adjusts expression numbers so that they begin with #1 and have no gaps.

Errors such as omitting a whole pair of parentheses may change the meaning of an expression, as was the case in the previous example. If only one parenthesis is omitted, the input becomes a meaningless character string, and DERIVE will issue a warning in the form of an appropriate syntax error message:

- ☞ Enter $4x-1/x-5$ after moving the focus into the entry line with .

Syntax error: Unexpected delimiter User 
      $4x-1/x-5$

DERIVE attempts to position the cursor in front of the expected error. Since a superfluous closing parenthesis can be spotted while a missing opening parenthesis obviously cannot, the first alternative is used for the error message. Depending on how the expression should look, you have to either delete the closing parenthesis or insert an opening parenthesis somewhere before it. For the above example there are six possible repairs:

input	$4x-1/x-5$	$4x-1/x-(5)$	$4x-1/(x-5)$	$4x-(1/x-5)$	$4(x-1/x-5)$	$(4x-1/x-5)$
output	$4x - \frac{1}{x} - 5$	$4x - \frac{1}{x} - 5$	$4x - \frac{1}{x-5}$	$4x - \left(\frac{1}{x} - 5\right)$	$4\left(x - \frac{1}{x} - 5\right)$	$4x - \frac{1}{x} - 5$

To choose the third variant insert an opening parenthesis between the division operator and the variable x .

- ☞ Edit the input string to $4x-1/(x-5)$ then press $\boxed{\leftarrow}$.²

#16: $4 \cdot x - \frac{1}{x - 5}$

When working with DERIVE, focus can be either in the entry line or in the algebra window (View). When focus is in the entry line, $\boxed{\text{Esc}}$ will move focus into the View. When focus is in the View, the **Author Expression** button or its hot key equivalent, $\boxed{\text{F2}}$, moves it into the entry line. Another method to move focus is using the mouse. Focus is where one last moved the mouse pointer to and then pressed the left mouse button.

- ☞ Ensure that focus is in the entry line by moving the mouse pointer into the entry line's entry field, then clicking with the left mouse button.

$\boxed{\text{||}} \quad \boxed{\surd} \quad \boxed{=} \quad \boxed{\leq} \quad \boxed{\approx} \quad \boxed{\asymp} \quad \boxed{4x-1/(x-5)}$

The disadvantage of this method is that it removes highlighting if there was any, so now you cannot simply replace the old input with a new one by starting to type the new input string. You could use the backspace key several times to delete the old string, but a more elegant way is to use the tab key.

- ☞ Highlight the contents of the entry line with the tab key $\boxed{\text{Ctrl}+\text{Tab}}$.

$\boxed{\text{||}} \quad \boxed{\surd} \quad \boxed{=} \quad \boxed{\leq} \quad \boxed{\approx} \quad \boxed{\asymp} \quad \boxed{4x-1/(x-5)}$

Enter and simplify $\sqrt{x^2}$. It is up to you to either use the 'Enter' key followed by the **Simplify** button or to use the entry line's **Enter and Simplify** button. The square root symbol $\sqrt{}$ can be obtained from the Math Symbol Toolbar ($\boxed{\sqrt{}}$) or entered as $\boxed{\text{Ctrl}}-\boxed{\text{Q}}$.

- ☞ Type $\sqrt{x^2}$ then press $\boxed{\text{Ctrl}}+\boxed{\leftarrow}$. This is the same as $\boxed{\text{Ctrl}}+\boxed{\text{Q}}$, i.e. this is a simple way to perform an "enter and simplify" operation without using the mouse.

#17: $\sqrt{x^2}$
#18: x

As an alternative, introduce a pair of parentheses around x^2 .

- ☞ Enter and simplify: $\sqrt{(x^2)}$

#19: $\sqrt{(x^2)}$
#20: $|x|$

² **Educator's footnote:** This is another example for an elementary educational use of DERIVE. Ask students how many different expressions they can generate by inserting 1, 2 (or more) pairs of parentheses into a valid string of characters. This is another excellent exercise to help students gain an understanding of the structure of expressions.

The last two examples are remarkable for two reasons. First, they demonstrate the importance of using parentheses to differentiate between $\sqrt{x}^2$ (meaning $(\sqrt{x})^2$) and $\sqrt{x^2}$ (meaning $\sqrt{(x^2)}$). Second, expression #20 shows how carefully DERIVE simplifies expressions.

The third power of $\alpha - 1$ is entered as follows:

- Enter $(\alpha - 1)^3$. (Insert Alpha with the Greek Symbol Toolbar button )


#21: $(\alpha - 1)^3$

- Try to expand expression #21, first by simplifying with .


#22: $(\alpha - 1)^3$

This did not change anything. Now you have an opportunity to apply one of those commands for which there is no equivalent Command Toolbar button.

- Prepare for opening the **Simplify** menu by moving the mouse pointer above the Menu Bar's **Simplify** command.




- Open the **Simplify** menu by clicking the left mouse button.

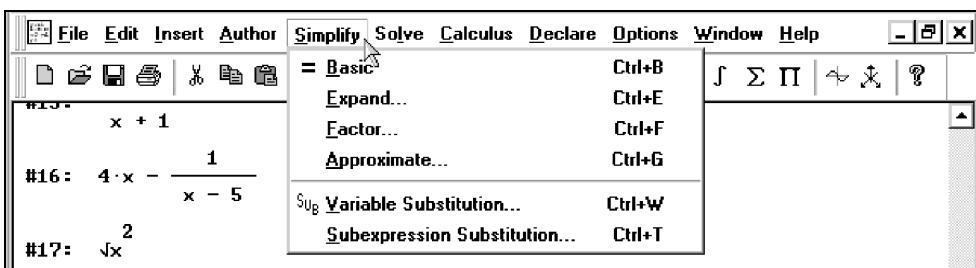


This menu offers several commands. The **Expand** command is appropriate for expanding an expression.

- Select this command by moving the mouse pointer above the word **Expand**...

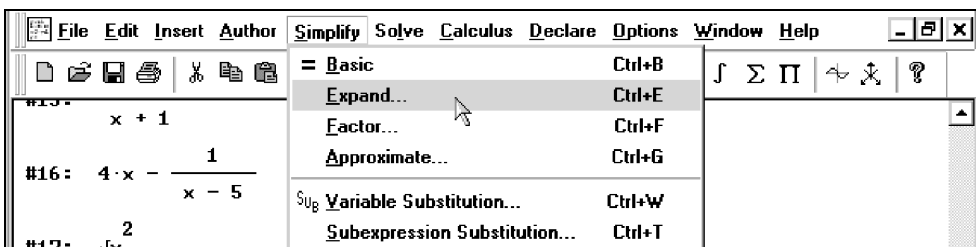

... then invoke the command by clicking on it with the left mouse button.

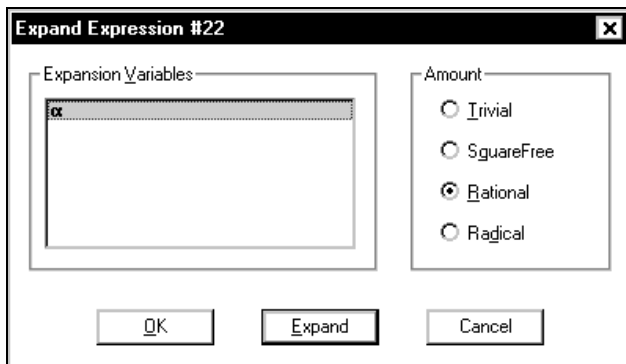

DERIVE opens the **Expand Expression** dialog box. You will obtain similar dialog boxes with all commands that require specification of parameters. The above dialog box requires the specification of the expansion variable and the amount of expansion. Often it is enough to accept the default specifications and immediately exit the dialog box with the 'Enter' key or by clicking the default button, which here is **Expand**. (The default button is the one prominently displayed.) Use the **Cancel** button or the **Esc** key to cancel the command. Use **OK** if you want an unsimplified application of the EXPAND function.

Perform the expansion with the suggested parameters by using **Expand** (either press **Enter** because this is the default button or click on **Expand**.)

#23:
$$\alpha^3 - 3 \cdot \alpha^2 + 3 \cdot \alpha - 1$$

A keyboard alternative for selecting the **Expansion** command from the **Simplify** menu is the following standard WINDOWS technique: **Alt**+**S** opens the **Simplify** menu (use **S** because of the underscore under the letter S in **Simplify**), then press **E** (again the letter with the underscore, but now without the **Alt**, which is used only to open menus.) This technique works for all menu commands.

For all buttons from the Command Toolbar there exist corresponding menu commands. Use commands for the next example. Enter, simplify, then approximate $\sin(\pi/4)$.

To enter the above expression, select the **Author>Expression** command, then type $\sin(\pi/4)$ **Enter**. (Obtain π from either the Greek or the Math Symbol Toolbar. A button π for this frequently used character is in both of these toolbars.)

#24:
$$\sin\left(\frac{\pi}{4}\right)$$

Simplify expression #24 with the **Simplify>Basic** command.

#25:
$$\frac{\sqrt{2}}{2}$$

This is another “beautiful” result. Before computing an approximation, add an appropriate comment to the worksheet in form of a text object.

- Insert a text object with the **Insert>Text Object** command, then type:

The following is an approximation of $\sin(\pi/4)$

The following is an approximation of $\sin(\pi/4)$

- (Try to) conclude the input with .


The following is an approximation of $\sin(\pi/4)$

The ‘Enter’ key, used from within text editing mode, added an extra line to the text object. This is not what was intended.

- Delete the extra line using the backspace key .


The following is an approximation of $\sin(\pi/4)$

Note that while DERIVE is in text editing mode, you have no access to certain buttons and menu commands as you can see in the Command Toolbar. The inaccessible buttons and menu commands appear dimmed. For example, the **Approximate** button is not available in text editing mode now, because a text object is highlighted.



You need to highlight an expression before you can approximate it.

- Highlight expression #24, then approximate it with **Simplify>Approximate**.

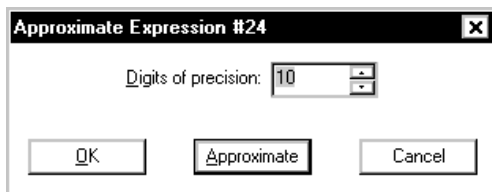

Other than the Command Toolbar’s **Approximate** button, the **Simplify>Approximate** command invokes a dialog box in which you are asked to specify the number of digits of precision. The currently displayed default value of 10 digits is also used by the **Approximate** button. The **Simplify>Approximate** command allows you to temporarily change the default value for the next computation. Change the number to 35, then use the default dialog exit.

- 35 

#26 : 0.70710678118654752440084436210484903

In DERIVE you can specify virtually any precision, meaning number of significant digits used for arithmetic. The practical limitations are given by the available memory and your patience. Note that computing time increases with increasing precision.

Update your text to indicate the chosen precision.

- Bring the text object into editing mode by clicking into it. Position the cursor immediately after the word: an


The following is an approximation of $\sin(\pi/4)$

- Change the text appropriately by using the backspace key  to delete the letter n, then adding: 35-digit


The following is a 35-digit approximation of $\sin(\pi/4)$

Reducing the text's font size requires the Formatting Toolbar to be on.

- Open the **View Toolbars** submenu with the **Window>View Toolbars** command.

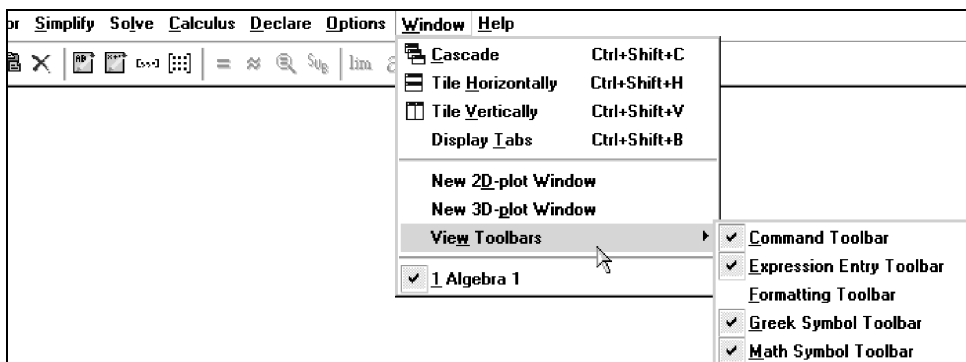

- Turn the Formatting Toolbar on by selecting the **Formatting Toolbar** command.



For editing DERIVE text, use the same techniques as in standard word processing programs. This toolbar indicates that the font size is 12 points. Before you can reduce the font size to 10 points, you need to highlight the respective portion of text.


- Highlight the entire sentence. Either use the technique of dragging the mouse pointer (hold the left mouse button down) from one end of the text to the other, or put the cursor at the text's end (or beginning), then repeatedly use the left (or right) arrow key together with the shift key, or place the cursor anywhere in the text, then triple-click.

The following is a 35-digit approximation of $\sin(\pi/4)$

- Prepare for changing the font size: Open the **Font Size** field's dropdown selection menu by clicking on .




- Select the number 10.



Alternatively, you could make the **Font Size** field active, then overwrite 12 with 10.


Now, announce the next example with an appropriate text.

- Prepare for entering text using the **Insert Text** button .

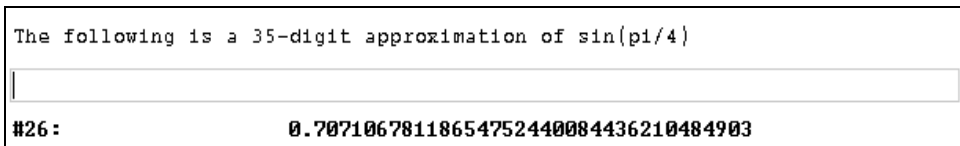


Oops—this is the wrong position. The new text should appear at the end of the document. Since the **Insert Text** button (as well as the **Insert>Text Object** command) adds the text object after the highlighted object, you need to highlight expression #26 first.

- Select expression #26.

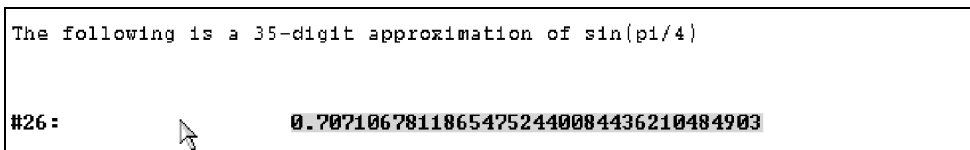

Although the frame around the unintentionally inserted, empty text object disappeared, it is still there. It can be deleted like any other object only after it is highlighted.


- Highlight the text object by clicking into it.



- Try to delete it, using the **Del** key.

This has no effect. Remember: Clicking inside a text object starts text editing mode. To select a text object for deletion, copying, or moving, click (precisely) onto the frame or into the narrow space left (or right) of the text object, or press **Esc** from within text editing.

- Select the text object for deletion using **Esc**.



The text object is selected now as is indicated by the frame around it. Make sure there is no cursor inside it. If there is, press **[Esc]** again.

- ☞ Delete the empty text object using the **[Del]** key.



The following is a 35-digit approximation of $\sin(\pi/4)$
#26: 0.70710678118654752440084436210484903

- ☞ Insert a new text object after the highlighted expression #26 (using **[BB]**), then start entering the text “Next we.”


Next we

Note that this text again has font size 12 as you can see in the Formatting Toolbar’s **Font Size** field. Earlier you only changed the format of existing text. Changing the default format of all new text objects is done via a command from the **Options>Display** menu.

- ☞ To change the default setting of future text objects, select the **Options>Display>Font of New Text Objects** command.

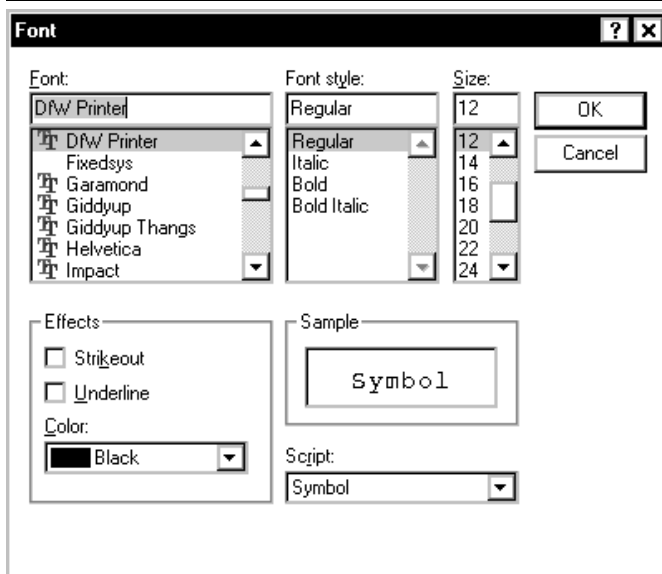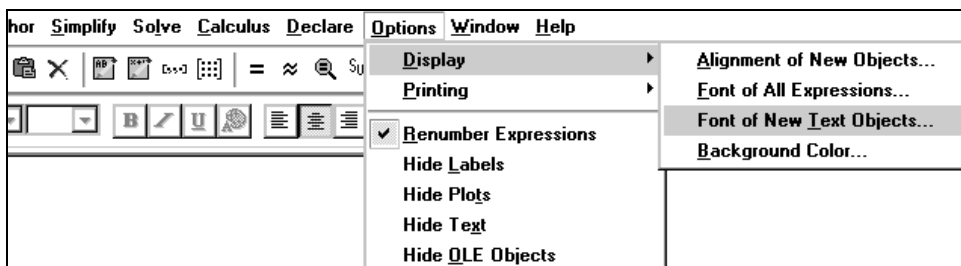

- Change the font size to 10 points by scrolling within the **Size** selection menu appropriately, then selecting the number 10, or by overwriting 12 with 10 via the keyboard.

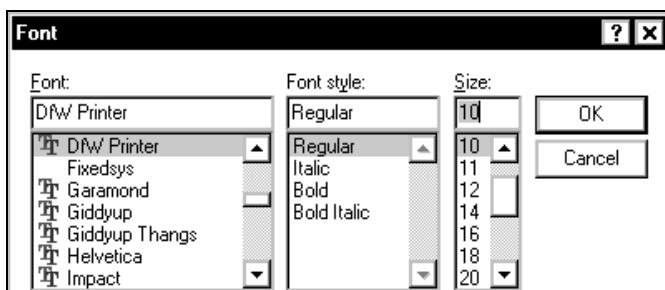

- Close the dialog with .

When continuing to write into the text object you started (you may need to click into the text object to put it into text editing mode), it still is in 12 point size, because the setting you just changed effects *new* text objects only.

- Delete the text object for a retry with the new default text font size. Select it by clicking into it then using . Delete with or .


#26: **0.70710678118654752440084436210484903**

- Enter a new text object with the following contents:

Next we experiment with entering special constants.


The text has font size 10 points now. You will not need the Formatting Toolbar any more in this session, so switch it off to provide more space for other purposes. Switching a toolbar off requires the same procedure as switching it on.

- Turn the Formatting Toolbar off using **Window>View Toolbars>Formatting Toolbar**.

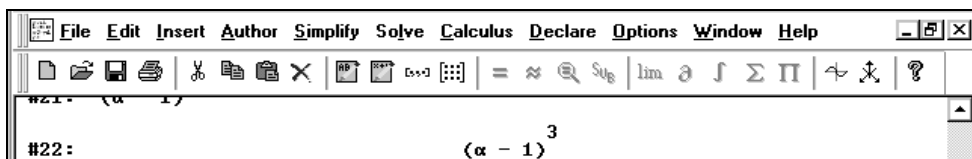

Experiment with the commands from the **Options>Display** submenu to become familiar with changing the “look” of a DERIVE worksheet.

- ☞ Select the **Options>Display** menu's first choice (i.e. **A**lignment of New Objects.)


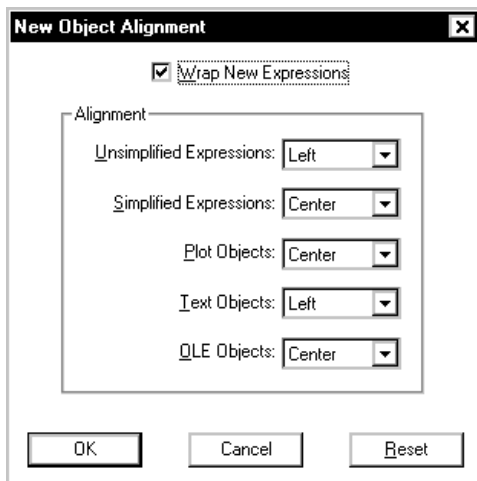


This invokes a dialog box that allows you to control the alignment of all the objects that can be in a DERIVE worksheet. **Unsimplified Expressions** are expressions entered by you or expressions obtained by adding an operator to an expression without simplifying. **Simplified Expressions** are expressions obtained from simplifying or approximating an expression. It is helpful to display user input left justified and the answers centered, as it is done by the default setting.


- ☞ To keep the settings as they are, exit the dialog with or the key.

Try the next command in the **Options>Display** submenu.

- ☞ Try the menu's second choice, **Options>Display>Font of All Expressions** (left picture), then change the text size by clicking on the **L**arge radio button.





- ☞ Carry out the change by leaving the dialog box with .

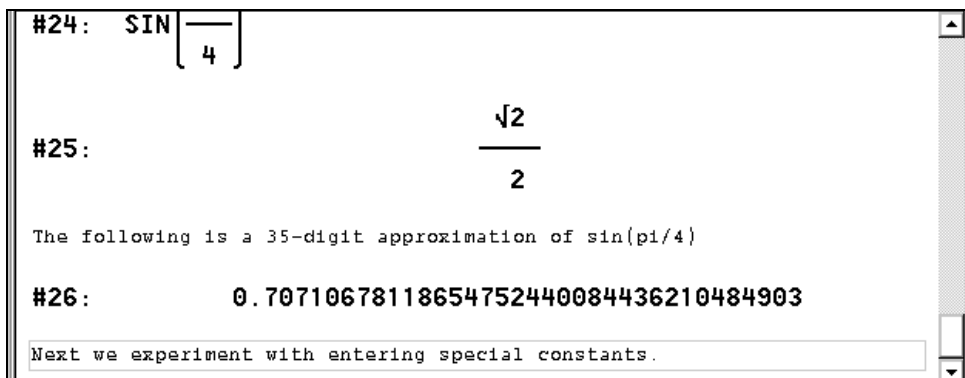

This font is useful for demonstration purposes, especially when using an overhead projector with a display palette. For personal work the small font may be preferable. Therefore, switch back to it and try a different color instead.


- ☞ To undo the change of expression size, select **Options>Display>Font of All Expressions** again, then change the text size back to small by clicking on the **Small** radio button (left picture.) Prepare for changing the font color by opening the **Color** selection menu.



- ☞ Select a color of your choice by clicking on it, then close the dialog with .


Earlier you entered π via the Greek or Math Symbol Toolbar. There are several methods for entering special constants such as π , the base of the natural logarithm e , or the imaginary unit i .

- ☞ To enter a sum of three π 's, first move the focus into the entry line using . Enter the first π from one of the two symbol toolbars, the second one by typing π , and the third one as +. (The pluses in between are all entered via the keyboard.)



These are the three methods of entering the number π . While some look different in the entry line, they all look and mean the same once they are entered:

- ☞ Conclude the input of the sum of three π 's with .




There are also three methods for entering the base of the natural logarithm e . Use all three of them to enter a sum of three e 's, then add the ordinary letter e to see the difference between a variable with this name and the famous constant. There is also another method of simplifying an expression.

- Enter the first e from the Math Symbol Toolbar using , the second one by typing #e, and the third one as  + . Then type: +e= (Note the use of the postfix equals operator.)



- End the input of the sum of three e 's and the variable e with .




The postfix equals operator causes an automatic simplification and the generation of an equation whose left hand side is the unsimplified expression and whose right hand side is the simplified expression. This method displays both the unsimplified and simplified expression on the same line, saving lines on the screen.

Similarly there are three methods for entering the imaginary unit. You can obtain I from the Math Symbol Toolbar, type #i, or enter it via the key combination  + .


Conclude this chapter as follows.

- Enter the text *"This is the end of the first chapter."*



Exit DERIVE. The **Exit** command can be found in the **File** menu.

- Exit DERIVE using the **File>Exit** command.

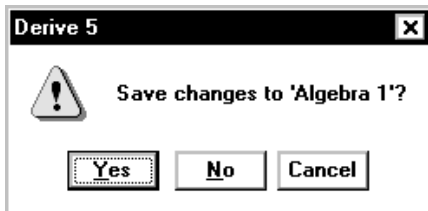

- To exit without saving the worksheet, select .

Summary

Algebra Window

 or Del	delete highlighted expression
 or Insert>Text Object or F5	insert text object after the highlighted object
 or Author>Expression or F2	enter expression, move focus into entry line
 or Simplify>Basic	simplify highlighted expression
 or Simplify>Approximate	approximate highlighted expression
File>Exit	exit DERIVE
Simplify>Expand	expand highlighted expression
Options>Display	change display settings
Window>View Toolbars>Formatting Toolbar	toggle the formatting toolbar
 , 	move highlighting one expression up, down
Esc	cancel command
click left mouse button into row occupied by the expression	highlight expression
click left mouse button into text object	edit contents of text object
click onto text object frame or left or right of it, or press Esc from within text editing	highlight text object (without text editing)

Expression Entry Toolbar


 or 	enter expression
	enter simplified expression
	enter expression and simplified expression
Esc	move focus into the algebra window
	highlight contents of entry field
 or Ctrl + P or pi	π
 or Ctrl + E or #e	base of natural logarithm e
 or Ctrl + I or #i	imaginary unit i
 , etc.	Greek letters
 or Ctrl + Q or sqrt	square root symbol
= (postfix equals operator)	enforce simplification

Chapter 2:

Documenting Polynomial Zero Finding

The emphasis in this chapter is on creating a simple mathematical document about the finding of the zeros of a polynomial. At the same time you will learn the corresponding basic techniques of using DERIVE.

 Start DERIVE.

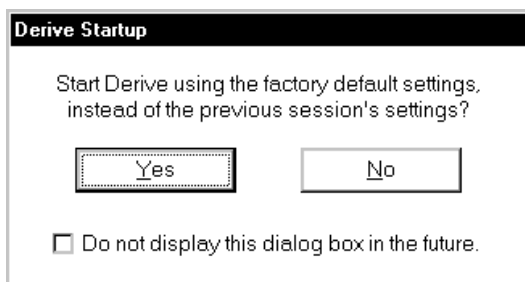

Your first session with DERIVE left a trace in the form of an initialization file. This file stores information about the status of DERIVE before you last shut it down. For example, the change performed with the **Options>Display>Font of New Text Objects** command is among the data in this file. The **Derive Startup** dialog gives you the choice to either start DERIVE with the factory default settings or start DERIVE with the settings from the initialization file, i.e. with some of the changes from the first chapter. This book is written so that each chapter starts with a factory default DERIVE. We recommend that you do the same.

 Start with a factory default DERIVE by exiting the dialog with .

Start the new document with an appropriate headline.

 Insert a text object containing the text "*Finding the zeros of a polynomial.*"

Finding the zeros of a polynomial

You will look for the zeros of the polynomial $y = p(x)$, $y = \frac{x^4}{2} + \frac{3x^3}{4} - \frac{5x^2}{4} - \frac{7x}{4} - \frac{1}{2}$.

- Enter the above polynomial by preparing for expression input with , then typing:

$$y = x^4/2 + 3x^3/4 - 5x^2 - 7x/4 - 1/2$$

(Intentionally leave out the /4 in the middle term.)

#1:
$$y = \frac{x^4}{2} + \frac{3 \cdot x^3}{4} - 5 \cdot x^2 - \frac{7 \cdot x}{4} - \frac{1}{2}$$

From here on, the key  or the button  will be displayed only in ambiguous situations. It will not be used any more for simple inputs such as the above. It is important for some of the features you are going to study and use in this chapter that you work with the above polynomial. Therefore, make sure it was entered properly.

As you know, it was not! The /4 in the middle term is missing. This is easily repaired by applying the **Edit>Derive Object** command to the highlighted expression.

- Edit the highlighted expression by selecting the **Edit>Derive Object** command.

      $y = x^4/2 + 3 \cdot x^3/4 - 5 \cdot x^2 - 7 \cdot x/4 - 1/2$

This brings a copy of the expression into the entry line with the cursor positioned at its left end, so the system is ready for editing.

- Insert /4 after $5x^2$, then end the input with .

#1:
$$y = \frac{x^4}{2} + \frac{3 \cdot x^3}{4} - \frac{5 \cdot x^2}{4} - \frac{7 \cdot x}{4} - \frac{1}{2}$$

The  key performed a *replacement* of the old expression with the new one. There is no need to delete the old expression when using the **Edit>Derive Object** command.

Consider looking at a house from several different positions. From each position you will see details that you can't see from other positions. Based on this idea, mathematicians use a variety of different representations for mathematical objects. The fourth degree polynomial that you entered is displayed as an *algebraic* representation. Next you will produce a *graphical* representation, because this representation is particularly useful for obtaining information about the zeros. In other words, you will plot¹ its graph.


Since the major goal in this session is to properly document the mathematical work, . . .

- . . . insert the text “*First we try a graphic approach by plotting the polynomial in a 2D-plot window.*”

First we try a graphic approach by plotting the polynomial in a 2D-plot window.


¹ “Plot” is a technical term. As such, it includes different aspects of drawing and graphical representation. It does not stand for mathematical accuracy, and in this book it will be used with three different meanings: for the activity of producing a graphical representation, for a graphical representation as an object, and for the corresponding DERIVE command.

- 🖥️ Prepare for plotting a 2D graph: Open a 2D-plot window by clicking on the **2D-plot Window** button  or selecting the **Window>New 2D plot Window** command.

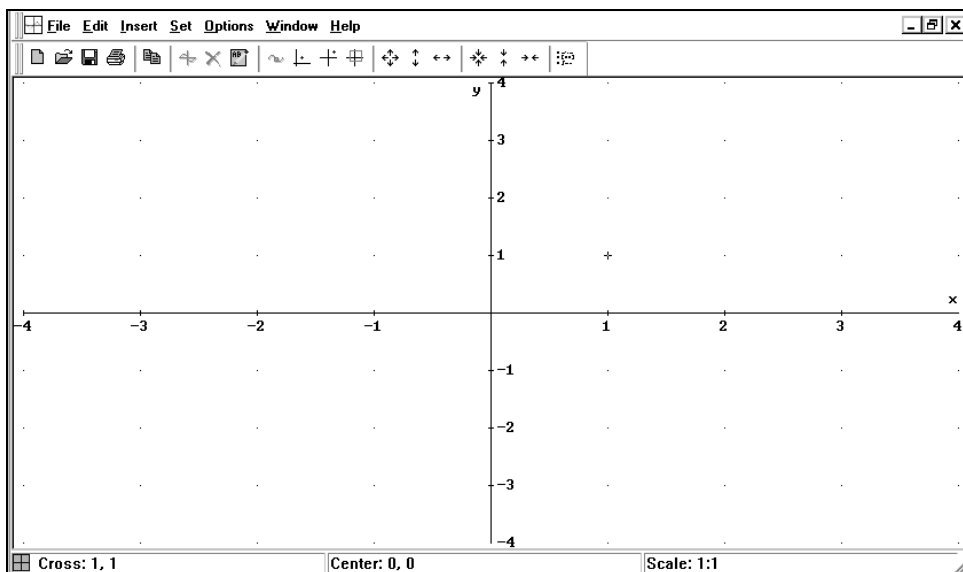

DERIVE created a plot window, so that you now have two windows to work with: an algebra window and a 2D-plot window. Use the usual WINDOWS techniques to flip between windows or change their sizes and positions.

- 🖥️ Put the two windows side by side using the **Window>Tile Vertically** command.

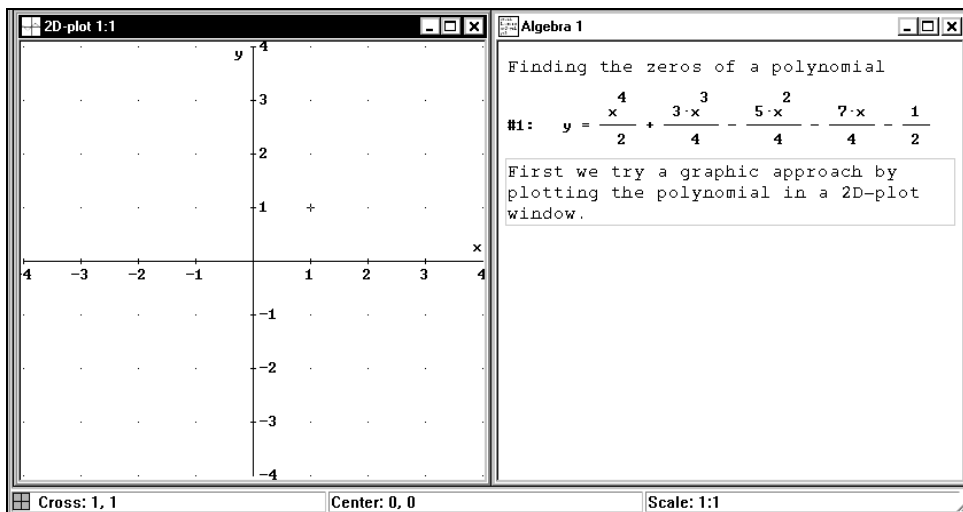


Each window is labeled with the window type in its upper left corner (**2D-plot** and **Algebra**). The active window's Title Bar is dark; the inactive window's Title Bar is dimmed. Since the plot window is active, the Menu Bar, the Command Toolbar, and the Status Bar are all different from

that of the algebra window. In particular, the Status Bar displays the following graphics information:

- **Cross** gives the coordinates of a movable cross,
- **Center** gives the coordinates of the picture center,
- **Scale** gives the scale factors of both axes,
- The crossed square icon preceding the word **Cross** indicates Cartesian coordinates.


☞ Draw the graph using the **Plot Expression** button .

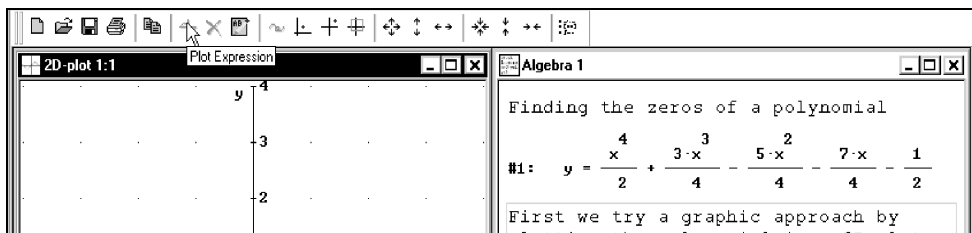

Oops—the **Plot Expression** button is dimmed inaccessible.

The reason is that the **Plot Expression** button (as well as its equivalent, the **Insert>Plot** command) plots the point set given by the algebra window's highlighted expression, but currently the second text object is highlighted and a text object can't be plotted.

☞ Highlight the polynomial by clicking on it (this makes the algebra window the active window), then make the 2D-plot window active again by clicking its Title Bar.

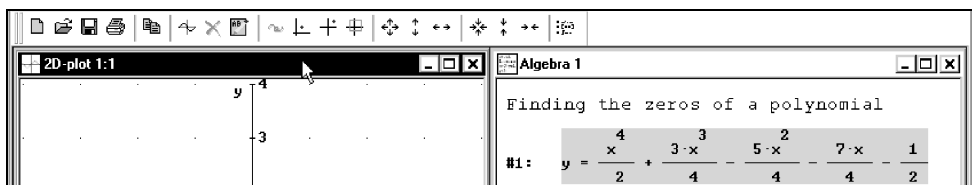


There are several techniques to make a different window active:

- From the algebra window use the Command Toolbar's **2D-plot window** button  and from the 2D-plot window use the Command Toolbar's **Algebra window** button .
- Click on the window you want to make active. This method, however, must be used with care: Clicking on an algebra window with the left mouse button is likely to alter the highlighting, clicking on a 2D-plot window with the left mouse button is likely to move the graphics cross, this might have unexpected effects. Therefore, it is better to click with the right mouse button to change windows, or to click, with any mouse button, into the window's Title Bar.
- From the algebra window use the **Window>y 2D-plot** command and from the graphics window use the **Window>x Algebra** command. (The numbers x and y may vary.)
- From the algebra window use the **Alt+W** and **y** keys and from the graphics window use the **Alt+W** and **x** keys as abbreviations of the above.


Now the **Plot Expression** button is available, and you are ready to plot the polynomial.

🖨 Draw the polynomial's graph using the **Plot Expression** button .

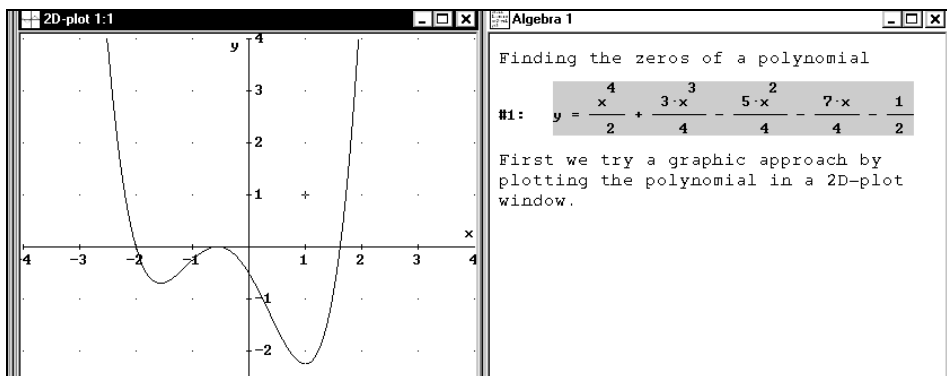


Now we have both an algebraic and a graphical representation of the polynomial available. However, the graphical representation is *outside* the algebra window's worksheet in its own independent plot window.

🖨 Copy the current plot window into the algebra window's worksheet by using the 2D-plot window's **File>Embed** command.

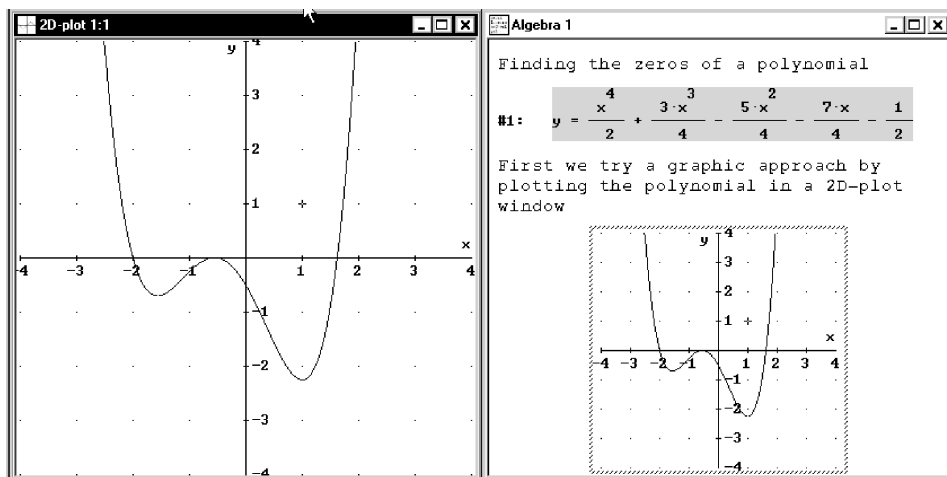

This “freezes” the current status of the plot window into the worksheet. The plot window is interactive; the embedded plot image is not. The embedded plot image can be brought back into an interactive plot window at any time with a double mouse click.



The graphical representation is useful for exploring the polynomial's zeros. However, from the current picture it is not clear whether the polynomial has two, three, or four distinct zeros. An answer can be found by inspecting the graph with the moveable graphics cross. Its coordinates are displayed in the status line, which now shows the cross at the initial position (1,1):

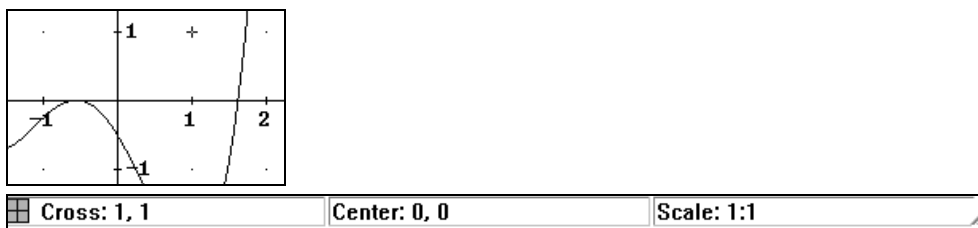

The color of the cross can be changed using the **Options>Display>Cross** command.

When the plot window is active, the cross can be repositioned by either moving the mouse pointer and clicking the left mouse button or by using the arrow keys $\rightarrow$, $\leftarrow$, $\uparrow$, and $\downarrow$.


- Move the mouse pointer to (1,-1), or near it, then click with the left mouse button to move the cross to this position (left picture). Use the arrow keys to move the cross to (0.5,0.5). Try $\text{Ctrl} + \rightarrow$, $\text{Ctrl} + \leftarrow$, $\text{Ctrl} + \uparrow$, and $\text{Ctrl} + \downarrow$ to move the cross in bigger steps.




The **Home** key moves the cross to the plot window center.

The trace mode is very useful for inspecting curves. This mode can be switched on and off with the **Trace Plots** button , the **Options>Trace Plots** command, or the corresponding hot key **F3**. As is customary in WINDOWS programs, a button with the same effect as a command is displayed in the respective menu left of the command, while the hot key is displayed right of the command. Check this out for the **Options>Trace Plots** command:

- Open the **Options** menu.

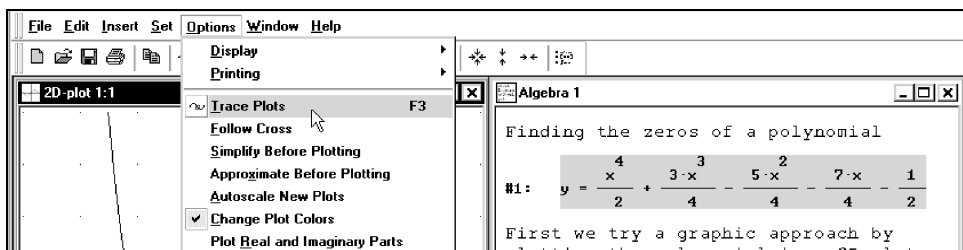


- Turn trace mode on by selecting the **Trace Plots** command.

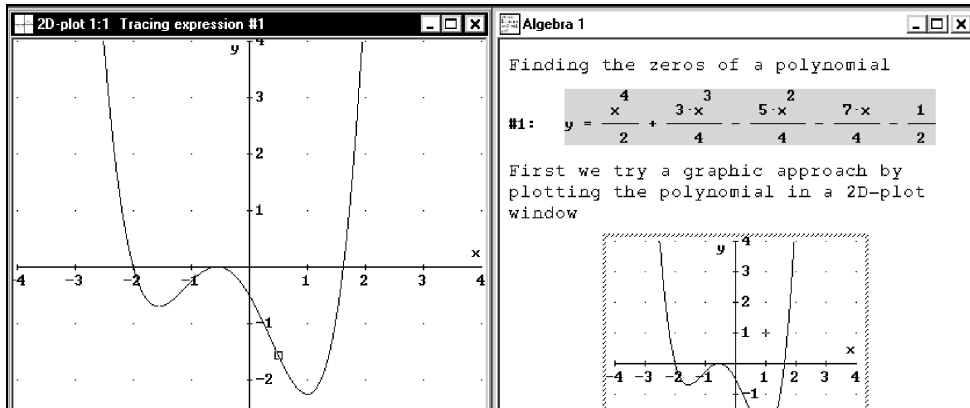


When trace mode is switched on, the cross changes its shape into a square and jumps vertically to the curve, with its horizontal coordinate unchanged. The expression number of the traced curve is displayed in the plot window's Title Bar (here: **Tracing Expression #1**). When trace mode is switched on, the square can be moved only along the curve. This can be done using $\rightarrow$ and $\leftarrow$, or using $\text{Ctrl} + \rightarrow$ and $\text{Ctrl} + \leftarrow$ for "big steps." It can also be done by moving the mouse pointer and clicking with the left mouse button to the new position. If there are several graphs displayed, use $\uparrow$ and $\downarrow$ to select another graph.

- Become familiar with moving the square. Use the arrow keys and the mouse to move the square. Finally, click the left mouse button at the point (2.5,0).



What happened to the square? It disappeared. Looking at the status line indicates the reason. The square's vertical coordinate is 18.5625, so it is far from the current plot area. You can ask DERIVE to move the plot area where the cross or square is.

- Move the plot area where the cross is by flipping the switch **Options>Follow Cross**.

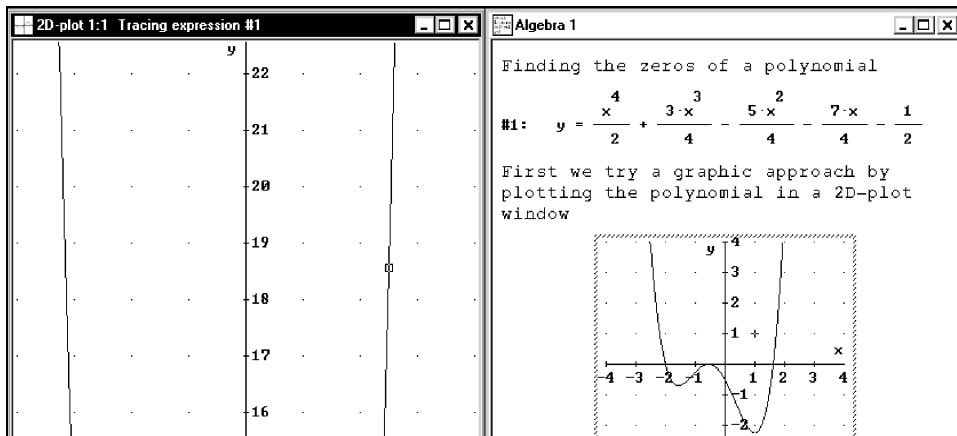


The plot window “follows” the square. This means that the plot ranges for the horizontal and the vertical axes are changed automatically to ensure that the cross is visible. Since this mode can destroy a chosen plot range, follow mode should be used carefully and is therefore switched off by default.

Turn follow mode off by selecting **Options>Follow Cross** again.

There are several ways to restore a previous range:


- While follow mode is on, you can click the left mouse button at a horizontal position where the corresponding vertical curve coordinate is within the original plot range. This requires some knowledge and reasoning about the curve.
- Independent of the follow mode status you may use the **Center on origin** button .
- Select the **Set>Plot Range** or the **Set>Plot Region** command, use the  button, then leave the dialog.
- If available, double click on an embedded version of the original graph. This last option is particularly convenient.

Restore the original graph by double clicking on the embedded graph.

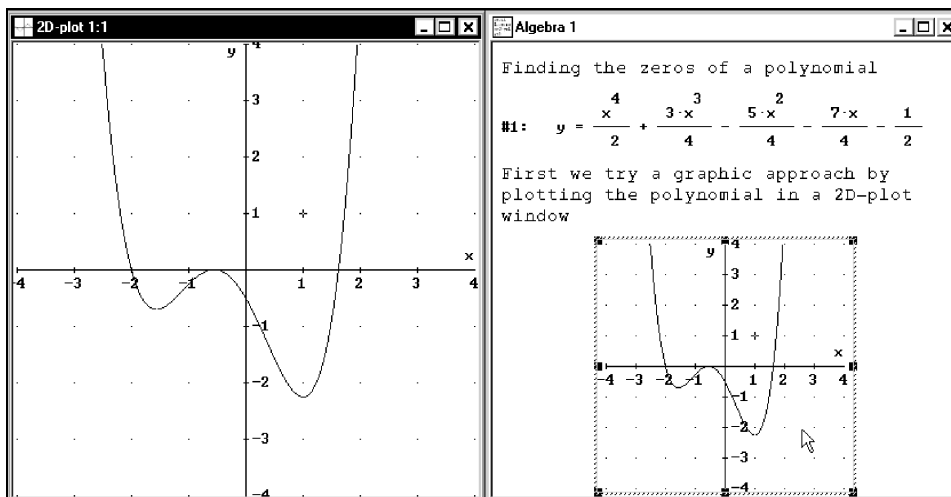

Trace mode was lost because the embedded graph was produced before trace mode was turned on. Switch trace mode on again to start looking for the polynomial's zeros.


Switch trace mode on with , then move the square to the rightmost zero, as near as you can get to the horizontal axis.



DERIVE displays the square coordinates as **Cross: 1.62, 0.01688368**. (Your numbers might be different.) Using the left arrow key  once moves the square to **Cross: 1.6, -0.1512**. You have


not found a position at which the y -coordinate is zero, but you can say that the polynomial zero must be between 1.6 and 1.62, probably being closer to 1.62. An obvious approach for getting closer is magnification.

- Zoom in using the Command Toolbar's **Zoom in** button  (left picture), then move the square closer to the rightmost zero.

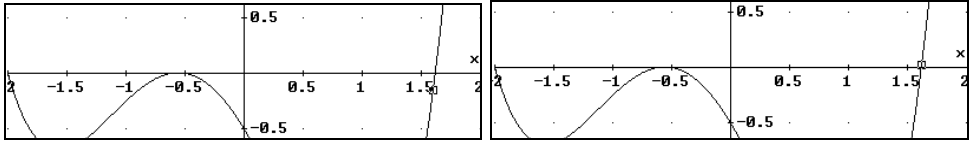


Now you get **Cross: 1.62, 0.01688368** and **Cross: 1.61, -0.06817304** (or whatever numbers you obtain) hence the polynomial zero is between 1.61 and 1.62.

- Restore the original scale factors by zooming out with the **Zoom out** button .





- Find an approximation for the leftmost zero by moving the square to it.



The leftmost zero seems to be at exactly $x=-2$.

Document what you found so far by inserting appropriate text objects.

- Switch to the algebra window. Resize the embedded plot: Select the image by clicking on it. The image is surrounded by 8 black squares, which can be used to resize it. Move the mouse pointer to the lower right corner until a double-headed arrow appears. Press and hold the left mouse button. With the left mouse button held down, drag the pointer towards the image center. When a suitable size is reached, release the mouse button.

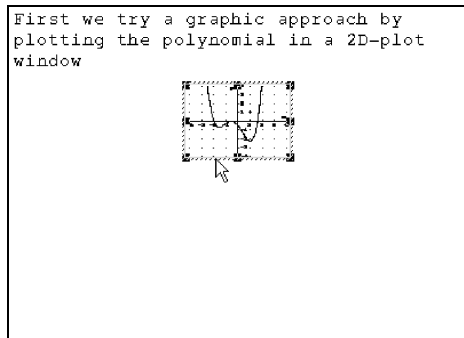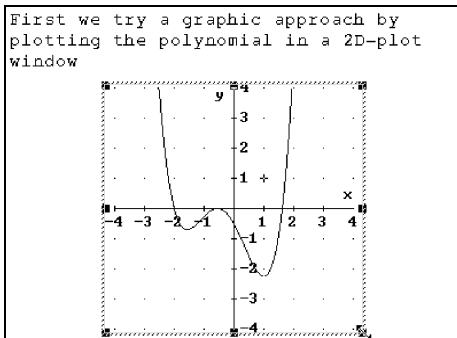


When you don't like the change of the aspect ratio such is in the above pictures, you can easily restore it. You will learn how to do this in Chapter 4.

Insert a text object documenting the method and result of your findings.

-  Insert a new text object and enter the following text (use the numbers you found):


Using trace mode we found $x = -2$ and $1.61 < x < 1.62$.

-  Search for more zeros: Make the plot window active, then move the square to the uncertain middle section.




You will find that there is one zero between -0.62 and -0.6. Another zero seems to be at exactly $x = -0.5$. To obtain a picture with intersections of the graph, magnify again.

-  Zoom in, this time using the **Zoom in** button  twice.

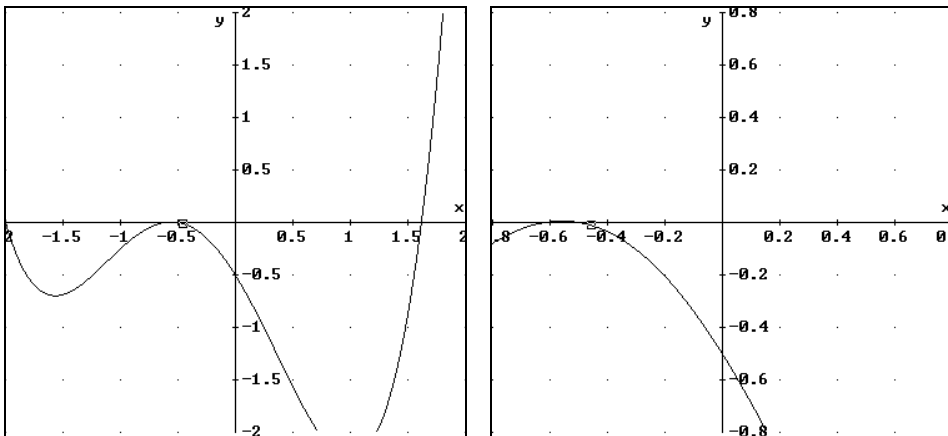


It becomes obvious that there are two zeros. Continue to magnify the graph.

-  Zooming in once more with  lets the square leave the plot window because follow mode is switched off (left picture). The very useful **Center on cross** button  shifts the plot range so that the square/cross is in the center of the new plot image.

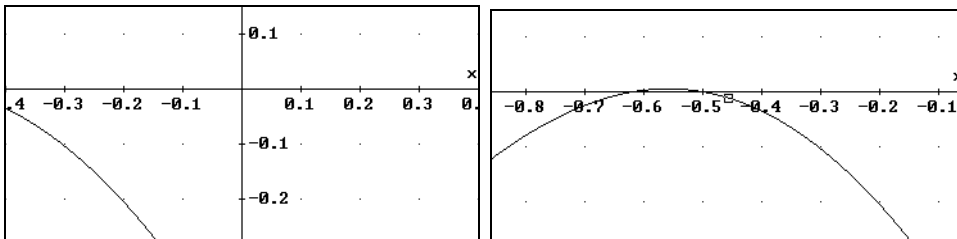


Move the square to get a better approximation of the left zero.

- Move the square near the left zero and note the cross coordinates in the Status Bar.



Now the change of sign happens between $x = -0.62$ and $x = -0.618$. Produce a graph with steeper intersections to get a more accurate answer.

- Zoom in vertically only, using the **Zoom vertical in** button .





A highly recommended tool is the **Set range with box** button , which allows to choose a crop rectangle graphically.

- Prepare for choosing a crop rectangle by using the **Set range with box** button .

The mouse cursor turns into a crosshair.

- Choose a crop rectangle: Click and hold the left mouse button at the top left corner of the desired area. Drag the mouse down and to the right until the box encloses the desired area.




- Release the mouse button.

Set 2D-Plot Range


	Minimum	Maximum	Intervals
Horizontal:	-0.66086956522	-0.45434782609	8
Vertical:	-0.02619047619	0.021428571429	8


The **Set 2D-Plot Range** dialog box is displayed, reflecting the numerical equivalents of the choices you just made with the mouse. This dialog box could be obtained in the first place using the **Set>Plot Range** command. But a graphical choice of the plot range is often more convenient.

See what happens if you confirm with .



Notice the complicated numbers below the tick marks (your numbers are likely to be different) and in the Status Bar scale factors. This is caused by the graphical box selection.

Zoom in again using the **Set range with box** button .

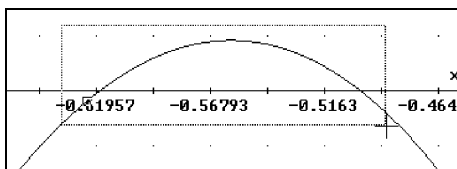

	Minimum	Maximum	Intervals
Horizontal:	-0.63527882798	-0.48768312854	8
Vertical:	-0.0038265306122	0.0070861678005	8


It is helpful to edit the suggested numerical values to the nearest simple values. Start by overwriting the highlighted value of the input field for the **Horizontal Minimum**. Then use the tab key  to make the next input field active. Enter the following values.

 -0.7  -0.4  6 

	Minimum	Maximum	Intervals
Horizontal:	-0.7	-0.4	6
Vertical:	-0.0038265306122	0.0070861678005	8

Make the values for the **Intervals** fields fit to the difference of the values for the **Minimum** and the **Maximum** fields. For example, 6 intervals for a horizontal range of length 0.3 (= difference of -0.7 and -0.4) ensures nice numbers below the tick marks.


 -0.01  0.01  4

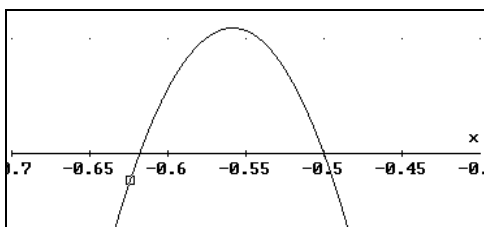

Use the trace mode square to find approximations of the two zeros.

The left zero lies between -0.6181818 and -0.6174242; and the other zero probably is at -0.5. All the above work now should be documented in the algebra window's worksheet by embedding the graph and adding an appropriate text object.

From the 2D-plot window select the **File>Embed** command, then switch to the algebra window and resize the embedded plot appropriately.

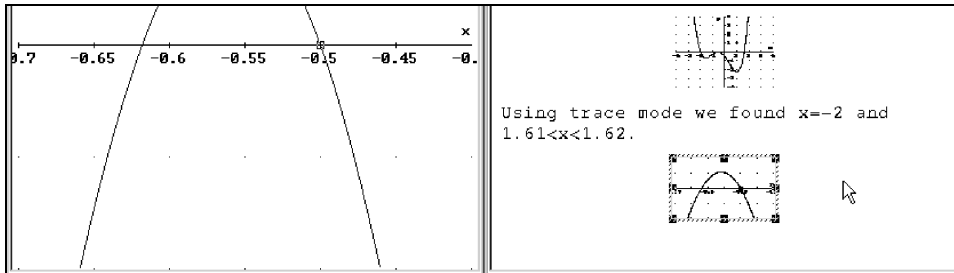

Insert a new text object documenting the method and result of your findings:

Using zooming we found $x=-0.5$ and $-0.6181818 < x < -0.6174242$.

Close the plot window, then open the algebra window to full size.

Close the plot window by clicking the left mouse button on the **X** button that is located in the window's upper right corner. Open the algebra window to full size by clicking on the **□** button, which is located left of the algebra window's **X** button.

Finding the zeros of a polynomial

#1: $y = \frac{x^4}{2} + \frac{3 \cdot x^3}{4} - \frac{5 \cdot x^2}{4} - \frac{7 \cdot x}{4} - \frac{1}{2}$

First we try a graphic approach by plotting the polynomial in a 2D-plot window

Using trace mode we found $x=-2$ and $1.61 < x < 1.62$.

Using zooming we found $x=-0.5$ and $-0.6181818 < x < -0.6174242$.

Next compute the zeros by solving the corresponding polynomial equation. Before doing so, enter an appropriate textual description of your approach.

- Enter the text: “Next we compute the polynomial’s zeros by applying the SOLVE function to the corresponding polynomial equation.”

Next we compute the polynomial’s zeros by applying the SOLVE function to the corresponding polynomial equation.

Generate the corresponding polynomial equation.

- Highlight the polynomial #1, move focus into the entry line with **[F2]** (which is the hot key for authoring expressions), then auto-paste a copy of the polynomial using the hot key **[F3]**.

$y = x^{4/2} + 3 \cdot x^{3/4} - 5 \cdot x^{2/4} - 7 \cdot x/4 - 1/2$

[F2] may become your most frequently used hot key.

- Replace y with 0 then conclude the input with **[↵]**.

#2: $0 = \frac{x^4}{2} + \frac{3 \cdot x^3}{4} - \frac{5 \cdot x^2}{4} - \frac{7 \cdot x}{4} - \frac{1}{2}$

For solving this equation either use the **Solve>Expression** command or the corresponding toolbar button .

- Prepare for solving the equation by applying the **Solve Expression** button .

Solve Expression #2

Solution Variables x	Solution Method ☒ Algebraically ☐ Numerically ☐ Either	Solution Domain ☒ Complex ☐ Real ☐ Bounds	Solution Bounds Upper: 10 Lower: -10
--	--	---	--

- Solve the equation. Accept all suggested parameters by selecting **[Solve]**.

#3: $\text{SOLVE} \left(0 = \frac{x^4}{2} + \frac{3 \cdot x^3}{4} - \frac{5 \cdot x^2}{4} - \frac{7 \cdot x}{4} - \frac{1}{2}, x \right)$

#4: $x = \frac{1}{2} - \frac{\sqrt{5}}{2} \vee x = \frac{\sqrt{5}}{2} + \frac{1}{2} \vee x = -\frac{1}{2} \vee x = -2$

Here $\vee$ is the mathematical symbol for the logical operator OR.

Similar to the Entry Toolbar’s **Enter and Simplify** button , **[Solve]** generated both an unsimplified expression (which is the formal application of the SOLVE function to the equation) and a simplified expression (which is the solution of the equation.) The exit **[OK]** would have generated the unsimplified expression only.

- Enter the text “*Expression #4 gives the four exact zeros of the polynomial.*”

Expression #4 gives the four exact zeros of the polynomial.

In order to compare these results with what you found graphically, approximate expression #4. Before doing so, again add a textual description of your approach.

- Enter the text “*We approximate #4 so that we can compare it with what we found graphically.*”

We approximate #4 so that we can compare it with what we found graphically.

- Approximate expression #4 by first highlighting it, and then applying the **Approximate** button .

#5: $x = 1.618033988$ $\vee x = -0.6180339887$ $\vee x = -0.5$ $\vee x = -2$

To turn this worksheet into a good piece of mathematical documentation, do some more editing, then print and save it. First, add a signature documenting author(s) and date.

- Switch the Formatting Toolbar on using **Window>View Toolbars>Formatting Toolbar**.



All fields and buttons are dimmed as long as there is no text object in editing mode.

- Add a text object at the end of the worksheet using . Choose a special format for the signature: In the Formatting Toolbar change the font size to 8 points and click on the **Right Justify** button .



- Enter “*This document was created by . . . on . . .*”

This document was created by B Kutzler & V Kokol-Voljc on Jan 6, 2000.


Next change the topmost text object into an attention-catching title line.

- Highlight the first text object’s contents using the usual text processing techniques.

Finding the zeros of a polynomial

Choose a format that is suitable for a title line, for example . . .


- . . . change to 14 point font size, bold () , centered () , then add a blank line.

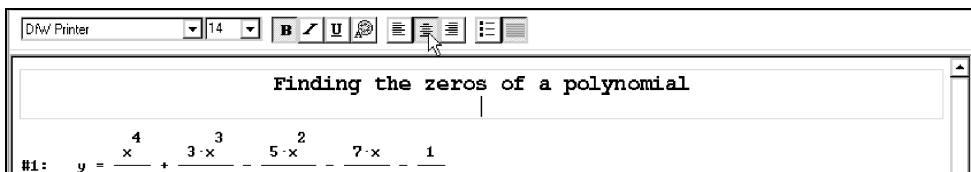


- Switch the Formatting Toolbar off using **Window>View Toolbars>Formatting Toolbar**.


Before sending a document to the printer, it is a good idea to do a print preview.


 Look at the print preview using the **File>Print Preview** command.

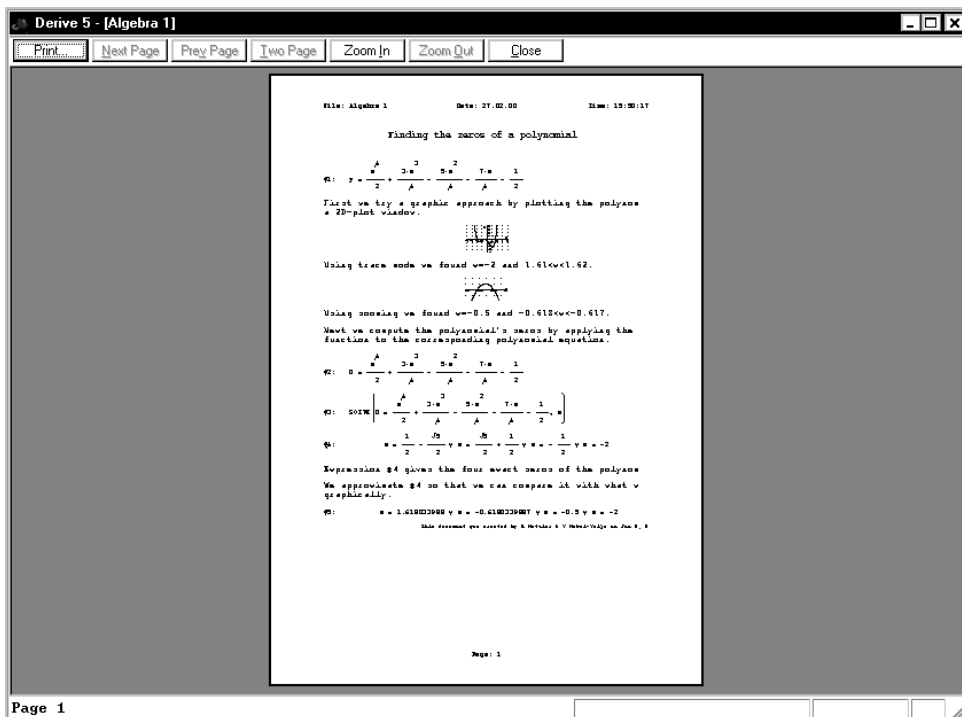

Print preview offers various options including a button for zooming in.


 Zoom in with .

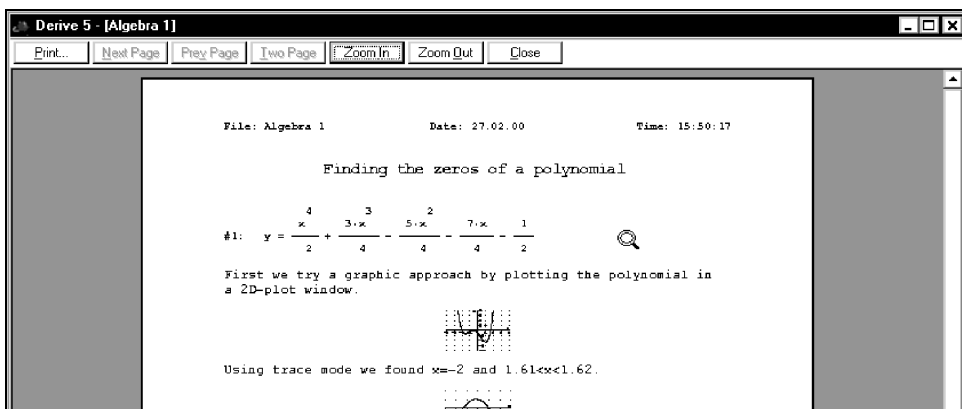

The magnifying glass shaped cursor in the upper right quarter of the page indicates that an alternative to using the  button is to click with the left mouse button.


Make the expressions slightly larger. Change the expression font size via the **Options>Printing** submenu.

- Prepare for changing the expression font size: Close the print preview window with **Close**, then select the command **Options>Printing>Expression Layout**.

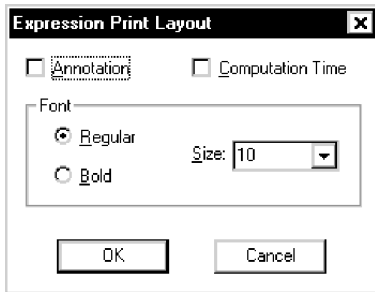



Here you can select the expression font size, choose between **Regular** and **Bold** font, and control the printing of **Annotations** and **Computation Times**. (By default neither is printed).

- Change the font size to 11 points, then close the dialog with **OK**.
Apply again the **File>Print Preview** command, this time zooming in twice.

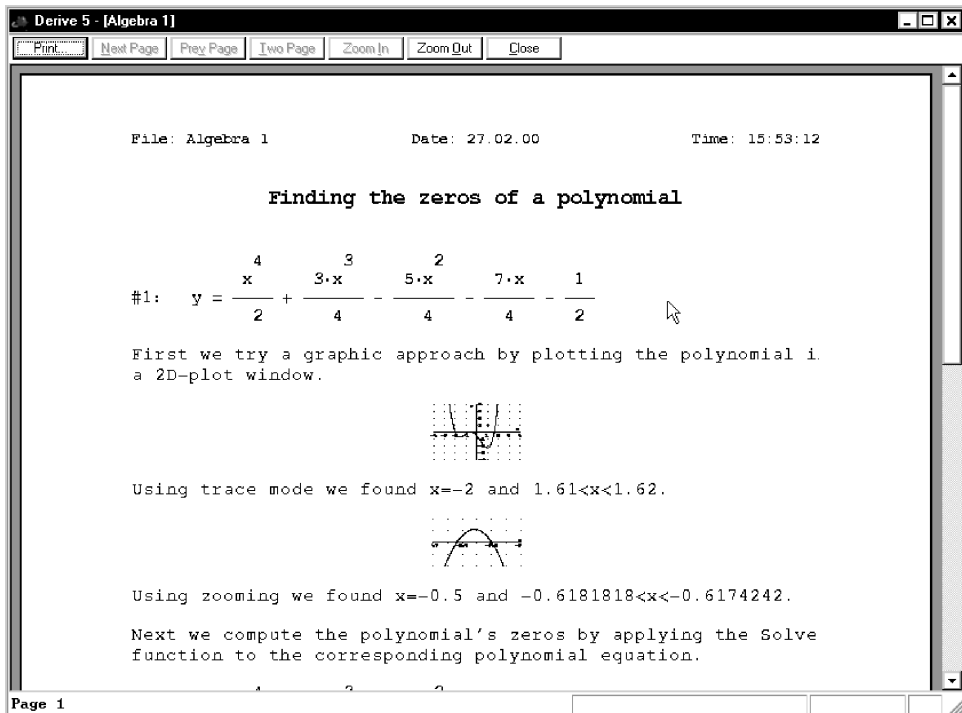


The worksheet is now ready to be printed.

- 🖨️ Prepare for printing the document using print preview's  button.

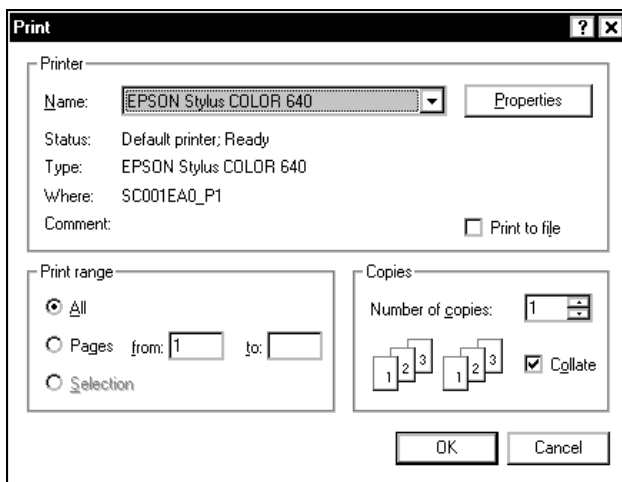


Make sure that the printer is properly connected, switched on, and set. In the **Printing** dialog box you can change the printer or the printing properties, change the print range from **All** to either a range of pages or the highlighted expressions, or change the number of copies from the default 1 to the number you want.

- 🖨️ Send the document to the printer with .

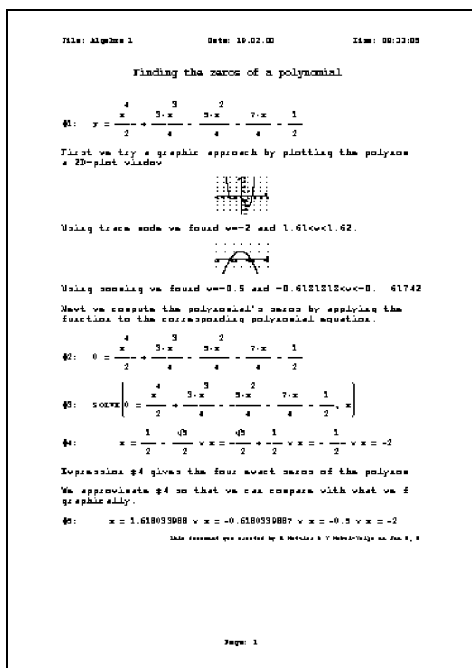

Saving the worksheet preserves your work for later use or modification.

- Save the worksheet by selecting the **File>Save As** command.

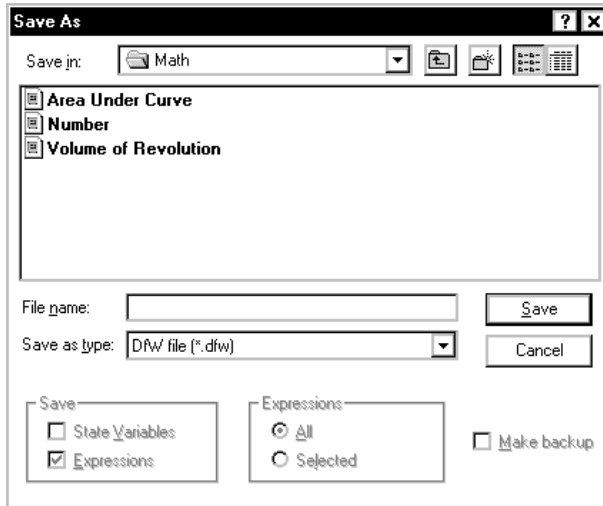

DERIVE suggests storing the file in the subdirectory **Math**. You may choose a different directory by selecting one from the selection menu that is offered for the **Save in** field.

- Accept the suggestion and enter the file name `chapter02` in the **File name** input field. Close the dialog with .



Notice the Title Bar. Previously there was **[Algebra 1]** as the indication of an unnamed algebra worksheet. Now there is **[Algebra 1 chapter02.dfw]**, indicating an algebra worksheet with name **chapter02.dfw**. The suffix **.dfw** is the default that is chosen when you do not specify a suffix as part of the filename.

- Exit from DERIVE.

Summary

Algebra Window

 or Solve>E xpression or Ctrl +  + E	solve equation
	open 2D-plot window or switch to one
	right justify highlighted object
	center highlighted object
File>S ave A s	save worksheet using a name
File>P rint P review	print preview
E dit> D erive O bject or double-click left or right of expr.	edit highlighted expression
O ptions> D isplay> C ross	change appearance of graphics cross
O ptions> P rinting> E xpression L ayout	format expression layout
W indow> N ew 2D plot W indow	open new 2D-plot window
double-click left mouse button on embedded plot	open embedded plot in plot window

2D-plot Window

 or I nsert> P lot	plot highlighted expression
 or O ptions> T race P lots or F3	toggle trace mode
	center plot region on cross
	center plot region on origin
 or F9	zoom in
 or F10	zoom out
 or F7	zoom in vertically
	graphically choose a crop rectangle
File>E mbed	copy plot window into algebra worksheet
S et> P lot R ange	set plot range borders
O ptions> F ollow C ross	toggle follow mode
 ,  ,  , 	move cross one pixel (one dot) on the screen
Ctrl +  , Ctrl +  , Ctrl +  , Ctrl + 	move cross several pixels
Home	move cross to plot window center

All Windows

W indow> T ile V ertically	arrange windows as right-left split (active window on the left)
---	---

Index

	124
	35
	35
$5x - 6 = 2x + 15$	63
$z = x^2 - y^2$	117
$z = \cos(x \cdot y)$	125, 132
$\vee$	67, 75
$\wedge$	75
$^\circ$	147
$:\in$	137, 138
$:=$	66, 96, 138, 167
∞	138
$\downarrow$	161
	4, 106
	6, 28, 29, 118, 209
	6, 28, 29, 118, 209
+	45, 121
+	46, 121
+	46, 121
+	46, 121
	5, 28, 29, 118
	5, 28, 29, 118
+	201
+	11, 64, 106
+	28
+	28
+ +	53
+ +	53
+ +	201
+	28, 29
+	28, 29
+	54, 201
+	20
+	20
+	11
+	54
+	54, 201
	5

	5, 13, 16, 243
	11, 126
	28, 36, 49, 122
	49, 64
	128
	28
	119
	119
	201
	11, 34
(Insert expression)	49, 64
.dfw	41
2:1	56
2D-plot Window button	25
3D-plot window button	117

A

abort computation	90
absolute value function	74, 139, 154, 198
accuracy	86
activate window	26
aggressive simplification	151
algebra window	3, 25
Algebra Window button	26
algebraic equation	232
algebraic representation	24
Algebraically radio button	91
algebra-state variable	66, 68, 84
algorithmic limitations	87
aliasing	133
Alpha	12
alternative to Edit>Derive Object	78
analytic geometry	185
AND	75
ANGLE	155
angle between two vectors	154
Angular unit	148
annotation	105

annotation of expression 6
 annotation's position 106
 apostrophe 51
Apply parameters to rest of plot list ... 175
 applying differentiation 207
Approximate button  6
 approximate computations 230
 approximate mode 83
 approximate step by step 88
 approximation tools 83
 arbitrary number of digits 83
 area 212
 aspect ratio 31, 115
 assignment expression 66, 96
 assignment operator 138
Asterisk 247
 audit trail 66
Author and Simplify button  8
Author Expression button  4
Author Expression button  8
Author Matrix button  162
Author Vector button  153
Author>Expression 13
Author>Matrix 162
Author>Vector 153
Auto Plot Color scheme 125
 automatic color cycling mode 156
 automatic renumbering 10, 52
 auto-paste 36
 autoscale mode 118
 avoid display 72
 avoid generation of duplicates 197
 axes 129
 axes labels 103
 axes titles 107

B

back accent operator ` 164
 background color 130
 backspace 14, 15
 base of natural logarithm e 21
Basic File 201
Binary 252
Bold button  37
 books about DERIVE 261

Boolean combination 77
 border lines/curves 76, 77
Bottom Maximum 125
Bottom Minimum 125
 box 129
 brackets 72, 137
 branch 230
Branch 232
 bring embedded plots alive 56
 Buchberger 73
 built-in functions 187

C

C File 201
Calculus>Differentiate 205
Calculus>Integrate 211
Calculus>Limit 104, 203
Calculus>Table 110
Calculus>Vector 109
 cancellation 90, 145
 cannot integrate 214
 case insensitive mode 65
Case Sensitivity 66, 246
 catastrophic cancellation 90
 cautious 230
Center 26
 center coordinates 101
Center Justify button  37
Center on cross button  32
Center on origin button  32
 change of sign 33
 change windows 26
Character mode 66, 246
 character string 188
 circle 68, 199
 CIRCUMCIRCLE 199
 circumscribed circle 196
 clipart 243
 clipboard 54, 191, 201
Close button  68
 close window 35
 coefficient 111
 COL 166
Collect 144
 colon-epsilon 138

colon-equals	66, 96
color	98
Color by	125
Command Toolbar	3
commands	12
common denominator	60
complex branch	230
Complex factorization	60
complex plotting mode	231
complex-valued function	229
Compressed	247
computer clock	254
computing time	6
Confucius	244
conjecture	229
conjunction	77
connect points	155, 194
constants, famous	135
constant- x grid curves	121
constant- y grid curves	121
constrained optimization	77
contiguous objects	53
convenience	203
convenient fast input	9
conversion constant	148
coordinate geometry	185
Copy button 	54
correct input	10
count number of digits	8
crop rectangle	33
Cross	26
cross product	154, 158
crosshair	33
cube	118, 128
cubic root	229, 232
curve's shape	174
Custom	124
Cut button 	54
cylindrical coordinates	182

D

danger of approximate arithmetic	90
data matrix	159
decide	87
decimal fractions	83
decimal numbers	249
Declare>Function Definition	193
Declare>Input Settings	66, 245
Declare>Output Settings	47, 246, 249
Declare>Simplification Set	84, 144, 232
Declare>Variable Domain	136, 229
default	68, 141
default text font size	17
definite integral	211
DEG	147
degrees	148, 155
Delete	122
delete all plots	98
delete expression	60
Delete Object button 	10, 60, 98
delete text object	16
delete variable declaration expr.	141
demo files	261
derivative	206
Derive Startup dialog	23
determinant of matrix	164
DfW file	189
dialog box	13
DIB File	201
die	253
DIF	215
DIF_APPS.MTH	207
difference of sets	168
differential equation	216
differentiation	205
Digits field	84, 249
digits of precision	15
DIM	253, 259
dimmed buttons	14
disguised subexpression	51
disjunction	75, 77, 236
display large expressions	20
display of axes	108
document mathematical work	24
documentation	146
domain declaration	138
dot operator	154, 163
Double Click Feature	45
double click on embedded plot	30
drag line	51

drag text field 107
 DSOLVE1_GEN 216

E

e 21
 edges of triangle 194
Edit 122
 edit DERIVE text 15
Edit>Copy 54, 201
Edit>Copy Plot Window 201
Edit>Cut 54, 201
Edit>Delete 60
Edit>Delete All Annotations 197
Edit>Delete All Plots 98, 173
Edit>Derive Object 24, 78
Edit>Mark and Copy 201
Edit>Paste 54
Edit>Plot 121, 123
Edit>Select All 78
Edit>Undelete 60
Educator's footnote .. 9, 11, 46, 64, 65, 93
Educator's footnote 138, 143, 146
 effect of using integer parameters 174
 Einstein 135
 elapsed time 90
 ELEMENT 72, 161
 ellipses 160
 embed plot window 27
 end of the document 191
Ending Value 109
 enter and simplify 9, 11
 Enter key  4
 equation with infinitely many sol. 65
 equation with no solution 65
 equivalence transformations 63
 equivalent 87
 exact precision mode 83
 exchange two windows 228
 exit DERIVE 21
 expand 12, 145
 expansion variables 47
 explicit form 70
 explicit solution 217
 exponentiation operator 7
Expression display 247

Expression Entry Toolbar 3
 expression font size 39
 extent of expression 44
 extract element from list 72

F

factor polynomial 59
 factorial 256
 factory default 1, 23, 245, 264, 265
 factory default box 117
 factory default plot range 102
 factory default precision mode 86
 FALSE 65
 family member 95
 family of curves 174, 217
 family of lines 97, 112
 family of points 100, 102
 family of tangents 210
 family of triangles 224
 famous constants 135
File>Embed 27
File>Exit 21
File>Export 201
File>Load>Data File 256
File>Load>Demo File 261
File>Load>Utility File 188, 193
File>New 54
File>Open 55, 191
File>Page Setup 201
File>Print 201
File>Print Preview 38, 201
File>Save As 41, 189, 201
File>Update 71, 108, 115
File>Write 201
 filter 92
Find Derivative button  205
Find Integral button  211
Find Limit button  104, 203
 finite sequence 96
 FIT 159
 fixpoint method 257
 flattened circle 68
 floatable toolbars 244
 floating point arithmetic 139, 231
 focus 4, 11

follow mode	30
font	105
font color	20
Font Size	16
Formatting Toolbar	15, 37, 85, 113, 243
Fortran File	201
four-function calculator	136
function as ordered pairs	169
function definition	96
function invocations	187
function plots	70
functional programming	259
fundamental theorem of algebra	232

G

Gaussian elimination method	73
generic coefficient	112
Gradient	124
graphical representation	24
graphics cross	27, 121
graphics square	29
Greek letters	145
Greek Symbol Toolbar	3, 12, 51
grid	70, 122
grid intervals	101
grid point	98, 114
grid size	123, 131
Groebner-bases method	73

H

Help>Contents	261
Help>Index	165, 206
heritage	110
Hexadecimal	252
highlight contents of entry line	11
highlight entire expression	45
highlight expression with mouse	6
highlight multiple objects	52
highlight text	15
highlight text object	16
highlighting subexpression	43
holes	139
horizontal drag line	51
horizontal length	101
horizontal line	97, 105

horizontal scroll bar	86
HOWOFTEN	254
hyperbola	70

I

i	21
IF	200, 256
imaginary component	139, 231
imaginary unit	21
implicit plot	70, 93, 235
implicit solution	217
import numerical data	256
inaccessible buttons	14
inactive window	25
increment button	84
incrementally rotated figures	223
indefinite integration	211
index variable	96
inequalities	73
inequality in two variables	75
INF	104, 138
infinity	104, 138, 204
influence of parameter	177
initialization file	23, 264
inner product	154
Input Mode	66, 245
Insert Annotation button 	105
insert expression	49, 191
Insert Text button 	6
Insert>Annotation	105, 195
Insert>OLE Object	244
Insert>Plot	26, 126, 180, 238
Insert>Text Object	14
inside the sphere	240
inspect a graph	27
INT	211, 216
integers	142
integration	205, 211
integration constant	211
interactive plot	27
interchange window positions	157
Internet Mailing List	261
interrupt	259
INTERSECT	189
intersection of sets	168

inverse function 226, 233
 isolated points 194, 228
 ITERATE 257
 ITERATES 257

J

jagged 131
JPEG File 201

L

label number 4
 labeled box 117
 labels 4, 195, 224
 least squares fit 159
 length of vector 154
 LIM 203, 215
 limit 104, 203
 limitations 83, 87, 107, 234
 LINE_ORTH 187
 list 72
 ln(0) 149
 logarithmic expressions 148
 logical statement 151

M

magnify 31, 119
Magnify plot button  119, 131, 240
Math file 188
 Math Symbol Toolbar 3, 5
 mathematical document 23
 mathematical identities 233
 matrix 100, 110, 161, 256
 matrix extraction 167
 matrix inverse 164
 matrix multiplication 163
Matrix Operations 166
 maximum color 124
 memory requested 263
 menu 12
 Menu Bar 3
 MIDPOINT 187
 million 86
 minimal restriction 137
 minimum color 124
Mode field 84

models 63
 move cross 28
 move highlighting 6
 move objects 51
 move the annotation 196
 multi-character variable names 9
 multi-line display 201
 multiple angles 144
Multiplication Operator 248

N

named constants 109
 naming convention 187
New button  54
 Newsletter 261
 noncontiguous objects 53
 nonnegative 136
 nonreal valued function 228
 nonsquare matrices 165
 notation 249
 NSOLVE 91
Number of Panels 123, 126
Numerically radio button 91

O

observation point 122
 odd multiples 142
ODE1.MTH 216
 OLE Objects 243
 one-digit odd integers 169
 one-letter variables 245
 one-row matrices 190
 online help 206
Open button  191
 open menu 13
 open window to full size 35
 optimization 77
Options>Approximate BeforePlotting 103
Options>Autoscale New Plots 118, 128
Options>Change Plot Color 99, 173
Options>Display 128
Options>Display>Alignment of New O . 17
Options>Display>Axes 108, 141
Options>Display>Cross 28
Options>Display>Font of All Express .. 19

Options>Display>Font of New Text	17
Options>Display>Grids	115
Options>Display>Plot Color	99
Options>Display>Points	99, 155, 194
Options>Follow Cross	29
Options>Hide Labels	224
Options>Plot Real and Imaginary P ...	229
Options>Printing>Expression Layout .	39
Options>Printing>Header and Footer ..	224
Options>Renummer Expression	52
Options>Simplify Before Plotting	102
Options>Startup	259, 265
Options>Trace Plots	28, 122
OR	67, 75
ordered pairs	169
orient the plot	117
oscillations	127, 133, 234, 235
outermost function	145
outermost operator	43, 45

P

parametric form	172
Parametric Plot Parameters	174
parenthesis	137
part of a circle	172
Pascal File	201
Paste button 	54
pathnames	263
pattern	216, 223
percentage of memory used	90
Percentage of physical memory	263
PERP_BISECTOR	187
perpendicular	158
perpendicular bisector	185
perpendicular vector form	185
persistent parentheses	43, 47
phase angle	232
photograph	243
physical screen length	69
pi	13, 20, 83
pixels	69
plot	24, 74
plot a vector	97
Plot button 	117, 126
Plot Color tab	124

Plot Expression button 	26
Plot Parameters tab	123
Plot Properties dialog	123
plot unsimplified expressions	102
PLOTINT	212
point	98
point of intersection	189
polar	235, 236
polynomial	56, 111
postfix equals	21, 82, 135
POWER_SET	169
powers of trig functions	145
precision mode	248
Precision section	84
prime numbers	160
Principal	232
print	40
print annotations	39
print bold	39
print computation times	39
print preview	38
print regular	39
procedural programming	256, 259
program	188, 256
programming languages	201
progress bar/dialog box	90
Prompt to use factory default	259, 263
prove	87, 151
pseudo-random number generator	252

Q

quadrant	139, 150
quartic equation	91
quintic equation	90

R

radian mode	147
Radical factorization	59
radix bases	246, 251
Rainbow	124, 127
RANDOM	252
random numbers	252
Rational factorization	59
Real	137
real branch	230

real numbers 142
Real radio button 92
 rectangular part of the screen 201
 recursive functions 256
 remove highlighting 10
 rendering program 139
 replace a subexpression 50
 replace expression's variables 49
 replace old expression with new one 24
 reposition annotation 107
 representations 24
 reset plot window 231
 resize embedded plot 31, 70
 restore original view 120
 restore plot range 30
 restore scale factors 31
Right Justify button  37
 root functions 232
Rotate down button  118
Rotate left button  118
Rotate plots button  119
Rotate right button  118
Rotate up button  118
 rotate, ROTATE 118, 222
 ROTATE_FIG 222
 rotation around x or y axis 179
 rotation control 131
 rotation matrix 221
 round-off errors 88, 139, 231
 ROW 166

S

scaffolding method 65
 scalar product 154
Scale 26
Scheme 124
 scientific notation 249
 screen images 201
 scroll bar 85, 86
 segment 155
 SELECT 160, 253
 select embedded plot 31
 select variable 48
 selected plot 122
 semi-colons 162, 190
Sensitive radio button 66
Set 2D Aspect Ratio dialog 69
Set Eye Position button  120
Set range with box button  33
Set>Aspect Ratio 69, 80, 172, 198, 240
Set>Coordinate System 182, 236, 237
Set>Eye Position 120
Set>Plot Range 30, 33, 99, 130
Set>Plot Region 30, 101, 130
 sets 168
 shaded area 75
 shallowest operator 44
 shift the function 175
 show the equation 199
 shrink 119
Shrink plot button  119
 simplification 233
Simplification Settings dialog 83
 simplification tools 83
Simplified Expressions 19
 simplify a subexpression 47
Simplify button  5, 135
Simplify>Approximate 14, 83
Simplify>Basic 13, 135
Simplify>Expand 12
Simplify>Factor 59, 91
Simplify>Subexpression Substitution .. 51
Simplify>Variable Substitution 49
 Simpson's rule 215
 simulate 253
 singularities 150
 size of points 99
 slow down 123
 smallest subexpression 45
Solution Domain field 92
Solution Method field 92
Solution Variables field 67, 73
 SOLUTIONS 190
 SOLVE 36, 91, 151, 190
 solve equation numerically 91
 solve equation step by step 63
Solve Expression button  36, 63
 solve polynomial equation 35
 solve system of equations 71
Solve>Expression 36

Solve>System	71, 159, 190
sphere	236
spherical plot	236
spiral staircase	177
square brackets	72, 137
square root	5, 11
Start menu	3
Starting Value	109
Status Bar	3
steeper intersections	33
step size	96, 109
stepwise approximation	88
stepwise computations	47
stepwise simplification	146
stop rotation	120
stop tracing	122
structure of expressions	43
SUB	161
subexpressions	43
subscript	96
substitution	49
subtract $2x$	63
suffix	41
summation theorem	144
surfaces in three dimensions	117
syntactical replace operation	51
syntax error	5
system of equations	71
system of inequalities	78

T

TABLE	109
tabs	55
tangent	206
tangent plane	124
TARGA File	201
template	207
term ordering	9
term structure	44
text editing mode	7, 14, 15
text object	7
THROWS	253
TIF File	201
tile windows	25
Titlebar	8, 29, 41, 189

too many windows	68
toolbars	244
Top Maximum	125
Top Minimum	125
touch	240
trace curve	121
trace mode	28, 120
trace mode does not work	70
Trace Plots button 	28, 120, 122
Tracing Toolbar	121
Transformation Direction	144
transformation rule	136
translation	175
transpose of matrix	164
triangle, TRIANGLE	193, 195, 221
Trig Powers	144, 145
trigonometric collect mode	145
trigonometric identities	142
Trigonometry	144
trigonometry expansion mode	145
Trivial factorization	60
TRUE	65
turn axes off	141
two-sided limit	203

U

undo command	60
undo variable declaration	141
union of sets	168
unique	234
unnamed worksheet	41
unselect expression	191
unselect plot	123
unselect variable	48
unsimplified expressions	19, 102
unwrap	86
update plot object	70
User Group	261
user-defined color scheme	122
user-defined functions	187
utility files	207, 259, 263

V

variable domains	136
variable names	9

variable ordering 47, 67
Variable Substitution button  49, 136
 VECT2D 156
 VECT3D 157
 VECTOR 95, 160, 210
Vector dimension 153
 vertical length 101
 vertical scroll bar 85
 View 3, 11
 visualize 93, 117, 155

W

window type 25
Window>Display Tabs 55

Window>New 2D plot Window 25
Window>New 3D-plot Window 132, 179
Window>Tile Vertically 25
Window>View Toolbars 15
Window>View Toolbars>Formatting T . 37
 word mode 66, 246
 worksheet 4
Wrap button  86

Z

Zoom in button  31, 127
Zoom out button  31, 133, 213
Zoom vertical in button  31
Zoom vertical out button  31, 213



Texas Instruments U.S.A.
7800 Banner Drive
Dallas, Texas 75251

